




Brisbane 270 Round Front Plus Standard Height

Driven by Design. The clean lines of Caroma®'s Brisbane 270 High Efficiency toilet (HET) illustrate that powerful performance does not have to sacrifice style.

- Utilizes 1.6/0.8 gpf (6/3 lpf)
- Caroma®'s signature trapway is twice the size of the industry average, virtually eliminating clogs
- Large fully-concealed trapway.
- Extreme installation adjustability: Can accommodate 10" to 12" rough in incrementally, and allows for approx. 1" of lateral movement.
- Bowl height 15½"
- Map Certified and Watersense Labelled
- Requires Brisbane 301033W Soft Close Seat

DESCRIPTION	CODE	WEIGHT (LBS)	LIST PRICE
Brisbane Tank	810266W	29	\$192
Brisbane 270 Bowl	833900W	77	\$310
Brisbane Soft Close Seat	301033W	5	\$ 97
Tank and Bowl and Seat		111	\$599

Additional Highlights

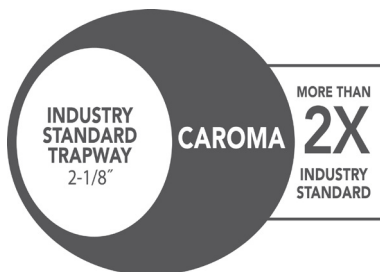

Signature Trapway

· At more than twice the size of standard North American trapways, Caroma® eliminates clogging.*

· *It is not waste that typically clogs toilets, it is paper products. The massive Caroma® trapway has been tested for decades in extreme conditions all over the world with almost perfect success! Clogging a Caroma® toilet would require an unreasonably excessive amount of paper.

caroma®

CI/SfB	(74.1)	g3
Date	October 2008	

Supersedes all previous issues

Brisbane 270 Round Front Plus

2.3.1

**1.6/0.8 gpf (6/3 l) Water Saving Dual Flush High Efficiency Toilet (HET)
Two Piece Ultra Low Flush (ULF) Vitreous China Washdown Toilet**



HIGH EFFICIENCY TOILET
HET



c-UPC®
IAPMO listed for USA & Canada

Brisbane 270 Round Front Plus 1.6/0.8 gpf (6/3 l) Dual Flush HET

Two Piece Ultra Low Flush (ULF) Vitreous China Washdown Toilet



A modern concept close coupled **1.6/0.8 gpf (6/3 l) Brisbane 270** dual flush toilet featuring unique two button activation providing substantial water saving compared to standard toilets. Adjustable rough-in and smooth rounded contours for easy cleaning. The closet bowl has been designed with rough-in of **10" (255mm) to 12" (305mm)** provided by plastic offset outlet connector option. The tank incorporates the high performance outlet valve which has been specially developed with the Brisbane 270 bowl to ensure optimum reliable flushing performance. Due to the substantial water saving benefits achieved by the 1.6/0.8 gpf (6/3 l) dual flush system, the toilet is suitable for multi-purpose applications where **water conservation** is important.

Closet Bowl: **Brisbane 270** 1.6/0.8 gpf (6/3 l) full flush washdown closet bowl with open flushing rim.

Outlet: Floor mounted suitable for connection to waste outlet with offset plastic outlet connector for 10" (255mm) to 12" (305mm) rough-in.

Tank: **Brisbane Tank** – has a free fitting lid and is suitable for domestic and light commercial applications. **Vandal Resistant Conversion Kit** – A simple to install conversion is available for the standard mechanism to lock lid onto the tank, recommended for use in heavy duty commercial areas. Code No. 413276.

Weight: 111 lbs (50 kg).

Water Control Valve: **Standard Bottom Entry Tank** – available as left hand inlet and incorporates a super quiet water control assembly. Internal overflow only.

Fixing: The tank is fixed directly to the closet bowl with a robust base fixing system without the need for wall fixing.

Seat: **Brisbane** seat Code No. 301033.

Color: White.

Dimensions: All dimensions are in inches and millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

