

# caroma®

CI/SfB	(74.1)	g3
Date	October 2005	

Supersedes all previous issues

## Caravelle 305 1.6/0.8 gpf (6/3 l) Water Saving Dual Flush High Efficiency Toilet (HET) Two Piece Ultra Low Flush (ULF) Vitreous China Washdown Toilet

# 2.3.1



HIGH EFFICIENCY TOILET  
**HET**



**Caravelle 305**  
**1.6/0.8 gpf (6/3 l)**  
**Water Saving**  
**Dual Flush High**  
**Efficiency Toilet (HET)**

**Two Piece Ultra Low Flush (ULF)**  
**Vitreous China Washdown Toilet**



A modern concept close coupled **1.6/0.8 gpf (6/3 l)** dual flush toilet featuring unique two button activation providing substantial water saving compared to standard toilets and adjustable rough in and smooth rounded contours for easy cleaning. The closet bowl has been designed with a **12" (305mm)** outlet rough in and overall length from the finished wall of **28 1/8" (730mm)**. The tank incorporates the Duo-Flo mechanism which has been specially developed with the Caravelle 305 toilet to ensure optimum reliable flushing performance. Due to the substantial water saving benefits achieved by the 1.6/0.8 gpf (6/3 l) dual flush system the toilet is suitable for multi purpose applications where **water conservation** is important.

**Closet Bowl:** **Caravelle 305** 1.6/0.8 gpf (6/3 l) full flush washdown closet bowl with open flushing rim.

**Outlet:** Floor mounted 12" (305mm) outlet connection.

**Tanks:** **Caravelle 2000 Tank** – has a free fitting lid and is suitable for domestic and light commercial applications. **Vandal Resistant Conversion Kit** – A simple to install conversion is available for the standard mechanism to lock lid onto the tank, recommended for use in heavy duty commercial areas. Code No.413276.

**Weight:** 83 lbs (37 kg).



**Water Control Valve:** **Standard Bottom Entry Tank** – available as left hand inlet and incorporates a super quiet water control assembly. Internal overflow only.

**Fixing:** The tank is fixed directly to the closet bowl with a robust base fixing system without the need for wall fixing.

**Seats:** The following Caroma seats are recommended: **Caravelle 2000**, and **Trident**.

**Colors:** White and colors as specified in color selector.

**Dimensions:** All dimensions are in inches and millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

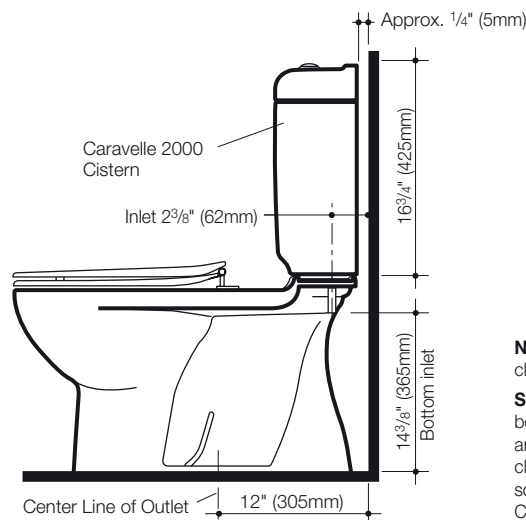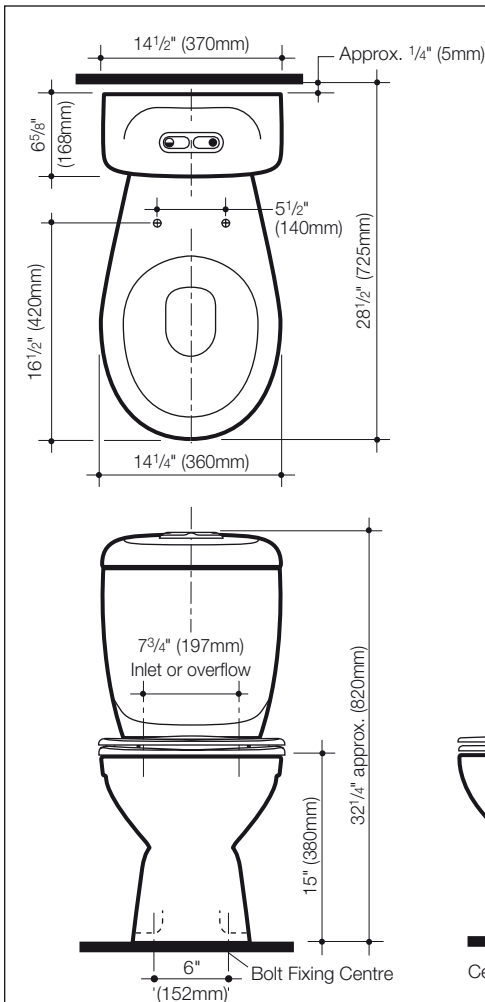

Caravelle 305:		Code No.
Tank	LH inlet	629435
Bowl		609151



**Note:** All height dimensions to underside of closet bowl, make allowance for bedding.

**Screw fixing:** The closet bowl should be bedded with an approved silicon caulking and fixed with corrosion resistant screws and closet bowl guard washers. Use Caroma screw fixing kit. Code No. 601150.