caroma®

CI/SfB			
	(74.1)	g3	
Date	October 2005		

Supersedes all previous issues

Tasman 270 2.9.1

1.6/0.8 gpf (6/3 l) Water Saving Dual Flush High Efficiency Toilet (HET)

Two Piece Ultra Low Flush (ULF) Vitreous China Washdown Toilet

HIGH EFFICIENCY TOILET
HET

Tasman 270
1.6/0.8 gpf (6/3 l)
Water Saving
Dual Flush High
Efficiency Toilet (HET)

Two Piece Ultra Low Flush (ULF)
Vitreous China Washdown Toilet

A modern concept close coupled **1.6/0.8 gpf (6/3 l)** dual flush toilet featuring unique two button activation providing substantial water saving compared to standard toilets and adjustable rough in and smooth rounded contours for easy cleaning. The closet bowl has been designed with rough in range of 10" (255mm) to 12" (305mm) provided by plastic offset outlet connector option. The overall length from the finished wall is 295/8" (753mm). The tank incorporates the Duo-Flo mechanism which has been specially developed with the **Tasman 270** to ensure optimum reliable flushing performance. Due to the substantial water saving benefits achieved by the 1.6/0.8 gpf (6/3 l) dual flush system the toilet is suitable for multi purpose applications where **water conservation** is important.

Closet bowl:	**Tasman 270** 1.6/0.8 gpf (6/3 l) full flush washdown closet bowl with open flushing rim.
Outlet:	Floor mounted suitable for connection to soil pipe with plastic offset outlet connector for 10" (255mm) and 12" (305mm) rough in.
Tanks:	**Tasman Mk2 Tank** – has a free fitting lid and is suitable for domestic and light commercial applications.
Water Control Valve:	**Standard Bottom Entry Tank** – available as left hand inlet and incorporates a super quiet water control assembly. Internal overflow only.
Weight:	60 lbs (27 kg).
Fixing:	The tank is fixed directly to the closet bowl with a robust base fixing system without the need for wall fixing.
Seats:	The following Caroma seats are recommended: **Caravelle 2000** and **Trident**.
Colors:	White and colors as specified in color selector.
Dimensions:	All dimensions are in inches and millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

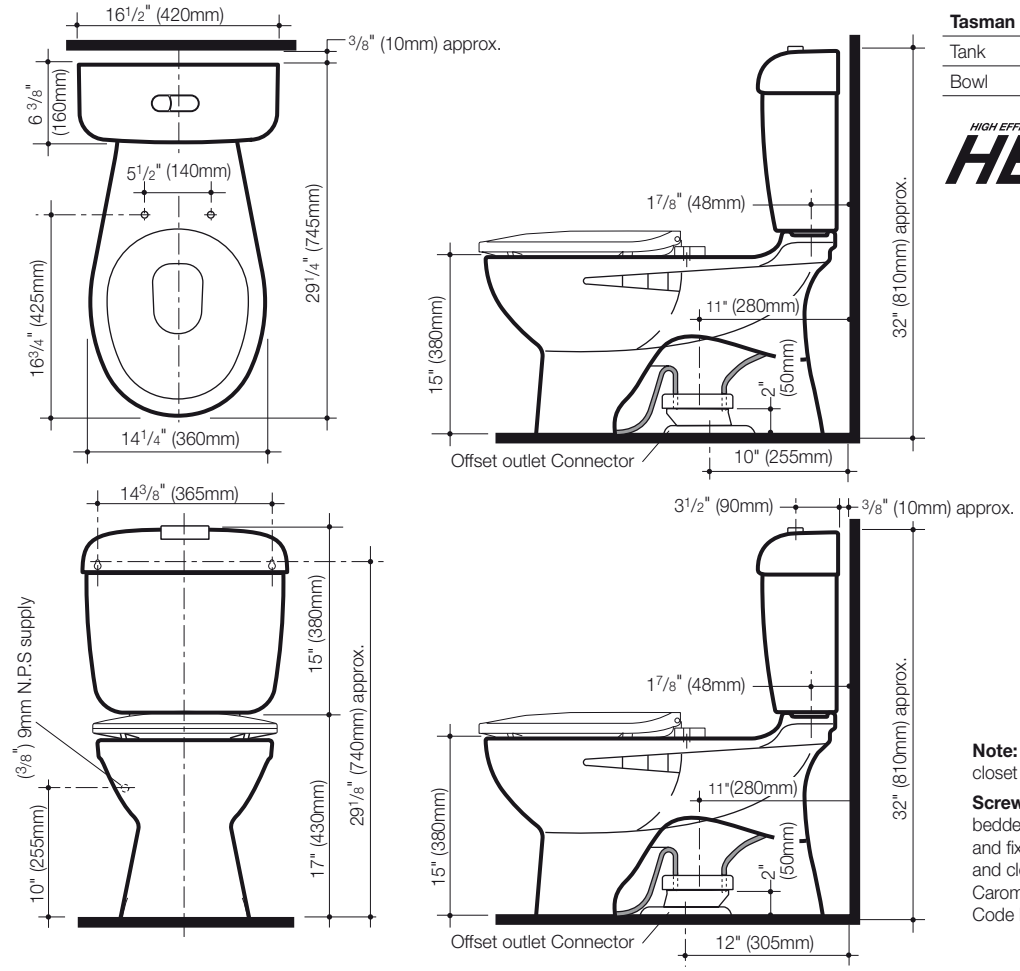

Tasman 270		Code No.
Tank	LH inlet	800032
Bowl		609169

HIGH EFFICIENCY TOILET HET

Note: All height dimensions to underside of closet bowl, make allowance for bedding.

Screw fixing: The closet bowl should be bedded with an approved silicon caulking and fixed with corrosion resistant screws and closet bowl guard washers. Use Caroma screw fixing kit.
Code No. 601150.