


Tools Required for Installation

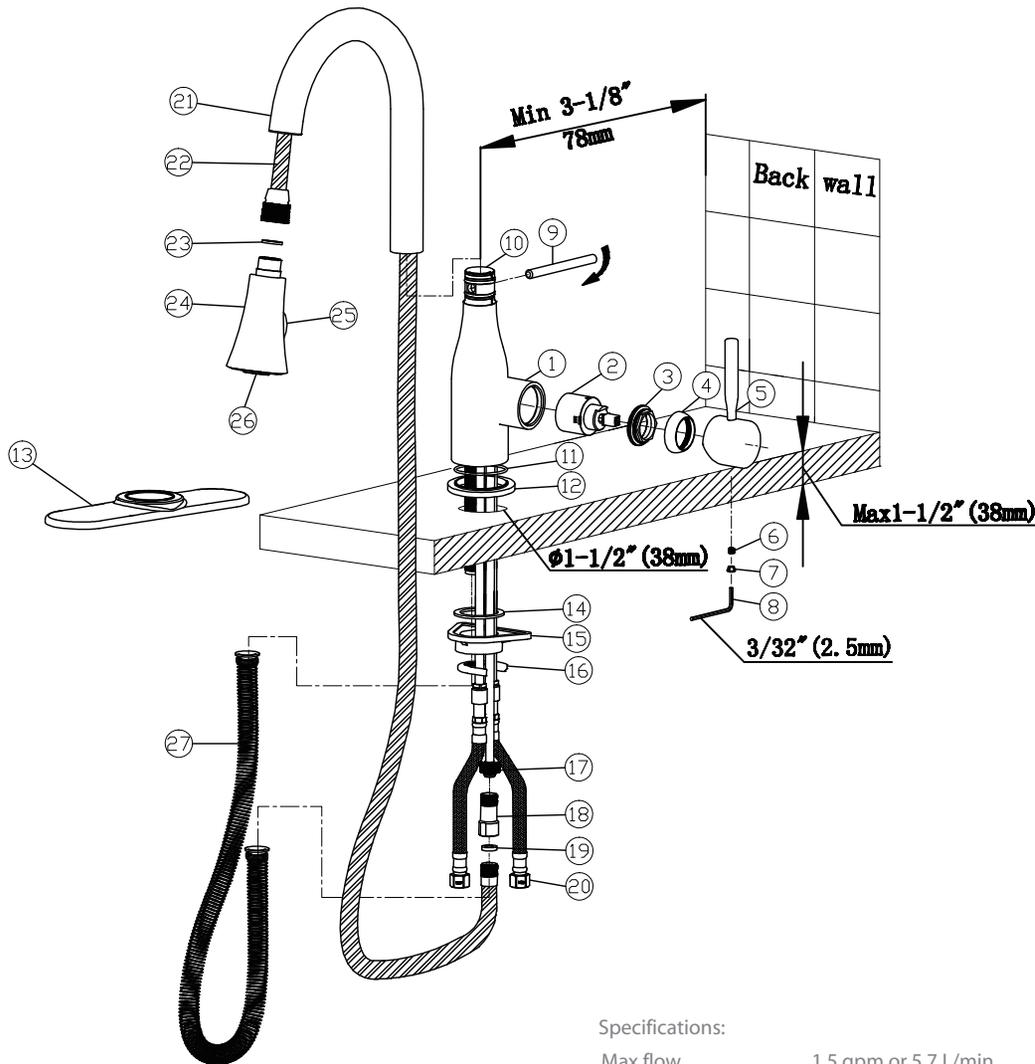

Specifications:

Max flow	1.5 gpm or 5.7 L/min at 60 psi
Flow pressure	15-72.5 psi
Max pressure	120 psi
Max temperature	176 °F or 80 °C
Max deck thickness	2-1/8" (54mm)
Inlet connection	3/8" comp

Installation Instructions

1. Shut off cold and hot water supply.
2. Ensure on the mounting surface, faucet hole should be 1-1/2"(38mm) in diameter. The center of hole should be at least 3-1/8" (78mm) away from the back wall.
3. For installation of faucet directly onto mounting surface, ensure O-ring (#11) is in place under faucet body (#1). For installation with escutcheon(#12) or deck plate (#13), remove O-ring (#11) before fitting escutcheon(#12) or deck plate(#13) under faucet body (#1)
4. Place faucet body (#1) on the mounting surface by feeding flex hoses(#20) and brass tubes through faucet hole.
5. Fit washer (#14), spacer (#15) and mounting bracket (#16) with thread tube (#10). Insert rod (#9) through holes of thread tube (#10)
6. Feed spray hose (#22) through spout (#21).
7. Feed spray hose (#22) through the faucet body (#1) from above. Then fit spout (#21) onto faucet body (#1) so that it snaps into place (#10).
8. With washer (#23) in place, screw spray head (#24) into spray hose (#22).
9. Slide spring (#27) onto spray hose (#22) from below.
10. With washer (#19) in place, screw connector (#18) onto spray hose (#22) and tighten with an adjustable wrench.
11. Push connector (#18) with spray hose (#22) into brass tube and then tighten the nut (#17) with an adjustable wrench.

Spray Pattern: Turn on faucet, water will always come from the aerator (#26). Push diverter button (#25) to switch to spray.

Care & Maintenance Instructions

SSI products are designed and engineered under strict quality standards. Regular and proper care of our products will ensure years of trouble-free service.

For Cartridge:

1. Shut off cold and hot water supply.
2. Pull out the decorative cap (#7) and with an Allen wrench (#8) loosen the set screw (#6) but do not remove it.
3. Pull off handle (#5), unscrew cap (#4) by hand and remove retaining nut (#3) using an adjustable wrench.
4. Remove cartridge (#2).
5. Wash the cartridge (#2) with clean running water and ensure that any trapped debris has

and turn clockwise to fasten faucet body (#1).
Note: If spacer (#15) is omitted, deck thickness can be increased by 5/8"(16mm) to a total of 2-1/8"(54mm).

6. Feed spray hose (#22) through spout (#21).
7. Feed spray hose (#22) through the faucet body (#1) from above. Then fit spout (#21) onto faucet body (#1) so that it snaps into place (#10).
8. With washer (#23) in place, screw spray head (#24) into spray hose (#22).
9. Slide spring (#27) onto spray hose (#22) from below.
10. With washer (#19) in place, screw connector (#18) onto spray hose (#22) and tighten with an adjustable wrench.
11. Push connector (#18) with spray hose (#22) into brass tube and then tighten the nut (#17) with an adjustable wrench.

been removed. Dry and lightly grease the seals (use only NSF approved silicone grease).

6. Replace cartridge (#2), retaining nut (#3) and cap (#4) followed by handle (#5).

For Aerator:

Regularly remove and wash aerator (#26) with clean running water and ensure that any trapped debris has been removed.

For Surface Finish:

To clean, use a soft and damp cloth with warm soapy water followed by rinsing with clean water and drying with a soft cloth. Do not use abrasive or harsh cleaners as they may result in finish damage.