

fluid

Innovative fixtures for life

SPECIFICATIONS

Customer Service: 1-800-460-7019
www.fluidfaucets.com

SSITM
SUSTAINABLE
SOLUTIONS
INTERNATIONAL

Specifications

- Heavy brass construction for durability and reliability
- German made Fluhs ceramic cartridge ensures life long trouble free service
- Dual handle operation allows both volume and temperature control
- SSI Eco-Care swivel aerator 1.2 gpm (4.6 lpm) at 60 psi
- Stainless steel flexible connection for 6" to 8" wide installation
- 1-1/2" (37mm) faucet hole size for drilling recommended
- Dual supply inlet connection – 3/8" comp & 1/2" thread
- Waste pop-up drain is included.

Finish

- CP (Polished Chrome)
- PVD-PN (PVD-Polished Nickel)





Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- NSF61-9
- ADA
- IAPMO / cUPC Listed
- EPA Watersense Listed

Warranty

- Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
- 2 Year Limited Warranty on all industrial, commercial and business applications.

fluid Symmetry Series Dual Handle Lavatory Faucet Model: F17006 F17006PN F17006-X F17006PN-X

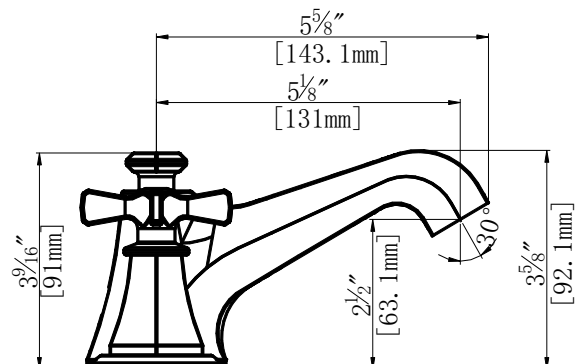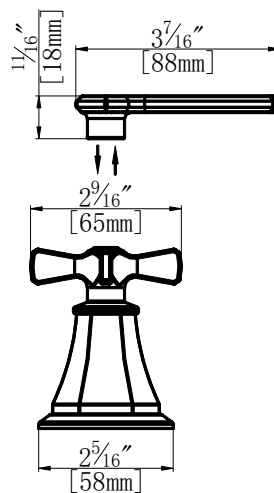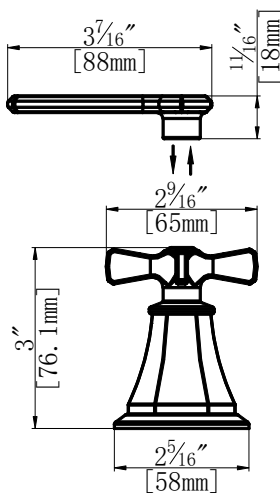

Model: F17006 with lever handle F17006-X with cross handle