fluid Innovative fixtures for life **SPECIFICATION**

Customer Service: 1-800-460-7019 www.fluidfaucets.com

Specifications

- Heavy brass construction for durability and reliability
- Kerox ceramic cartridge ensures life long trouble free service
- Single Lever handle operation allows both volume and temperature control
- Max-temperature limit stop for added safety.
- SSi Eco-Care swivel aerator 1.2 gpm (4.6 lpm) at 60 psi
- SSi "Speed Connector" for an easy spout installation
- Single cover plate trim available
- Available waste pop-up drain
- Must be used together with the valve body F3000B for horizontal installation or with F3001B for vertical installation
- Used as wall mounted tub filler when flow straighter is used in lieu of aerator (F18008T-S with flow straighter)

Finish


- CP (Polished Chrome)
- PVD-BN (PVD Brushed Nickel)

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- NSF61-9
- ADA
- IAPMO / cUPC Listed (pending)
- EPA Watersense Listed (pending)
- AB1953 California Lead Plumbing Law Certified (pending)

Warranty

- Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
- 2 Year Limited Warranty on all industrial, commercial and business applications.

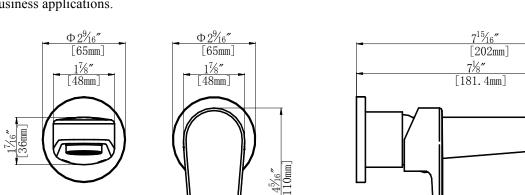

fluid Utopia Series Single Lever Wall Mount Lavatory Faucet Model: F18008T







 $5^{\circ} \pm 10^{\circ}$

SUSTAINABLE SOLUTIONS INTERNATIONAL