

# Limited Lifetime Faucet Warranty

Fluid<sup>®</sup> warrants its faucets to be free from defects in material and workmanship for as long as the original consumer purchaser owns his or her home.\* This warranty applies only in original installation location. If a defect is found in normal residential use, Fluid<sup>®</sup> will, at its election, repair, provide a replacement part or product, or make an appropriate adjustment. Fluid<sup>®</sup> reserves the right to examine the product in question and its installation prior to replacement. This warranty is limited to replacement of defective parts only. Damage to a product caused by accident, improper installation, misuse, or abuse is not covered by this warranty. Improper care and cleaning will void the warranty.\*\* Replacement parts can be obtained from your local dealer or directly from the Fluid<sup>®</sup> warehouse. Dated proof of purchase must accompany all warranty claims. This warranty applies only to Fluid<sup>®</sup> faucets installed in the United States of America, Canada or Mexico (North America).

Fluid<sup>®</sup> recommends using a certified plumber for faucet installation and repair. Incidental and consequential damages, labor charges, repair or replacement costs are expressly excluded. In no event shall the liability of Fluid<sup>®</sup> exceed the purchase price of the faucet. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. This warranty gives you specific legal rights which vary from state/province to state/province. If you find any such problem with your product, please immediately contact your nearest Fluid<sup>®</sup> dealer or sales representative.

## Need Help?

For additional assistance or service call

Toll Free: 1 800 460 7019

Fax: 1 604 430 5050

[www.fluidfaucets.com](http://www.fluidfaucets.com)

# fluid

**SSI**<sup>™</sup>  
SUSTAINABLE  
SOLUTIONS  
INTERNATIONAL

## Installation Instructions for **Pull Down Kitchen Faucet**

\* Two year warranty on commercial applications.

\*\* Never use cleaners containing abrasive cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for surface finishes. This will void the warranty.

This faucet meets or exceeds the following standards:  
ASME A112.18.1 / CSA B125.1 / NSF61-9  
AB1953 California Lead Plumbing Law Certified  
This product has been tested and certified by IAPMO.



IAPMO LISTED

**SSI**<sup>™</sup>  
SUSTAINABLE  
SOLUTIONS  
INTERNATIONAL

Sustainable Solutions International  
Phone: 1 800 460 7019  
[www.SustainableSolutions.com](http://www.SustainableSolutions.com)


# Tools Required for Installation



Rod Tool



Adjustable Wrench

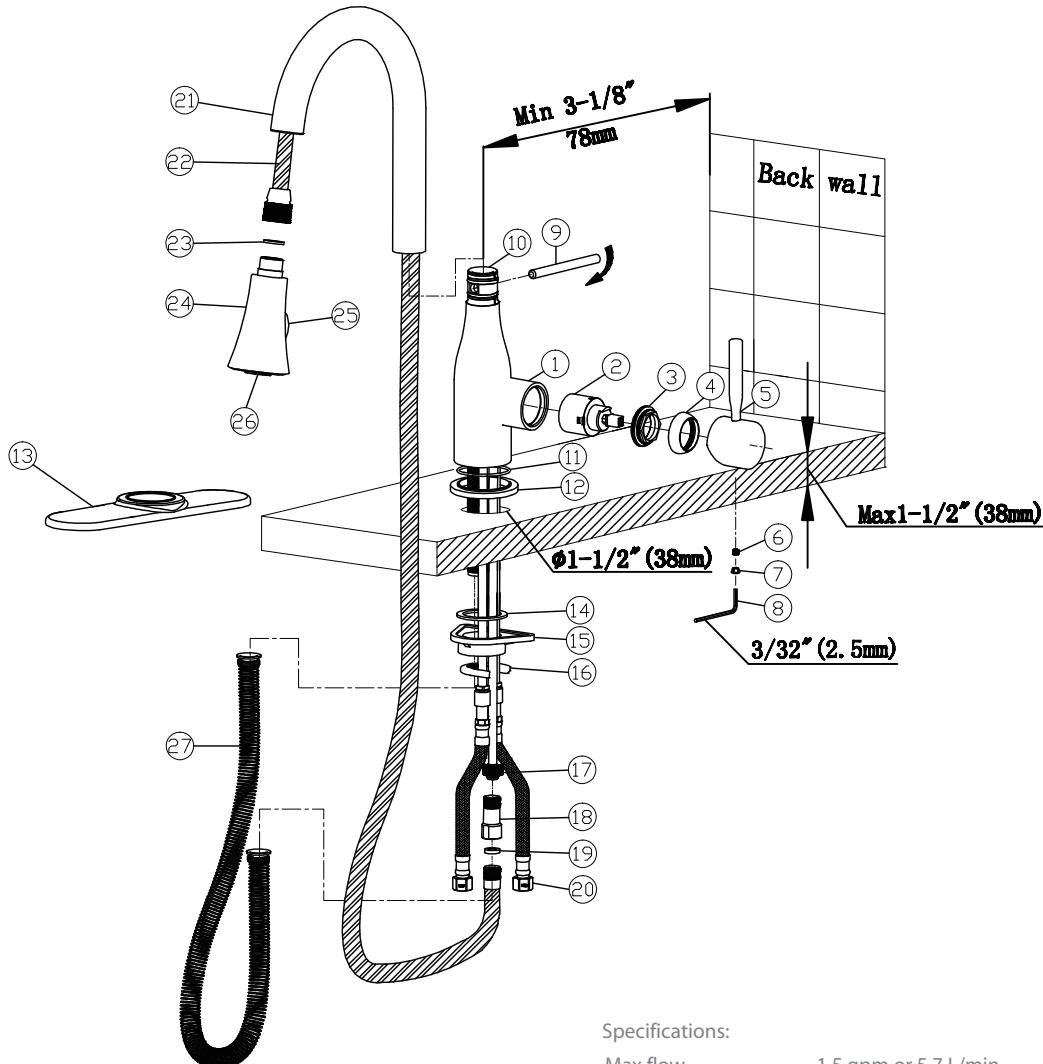

## Specifications:

Max flow	1.5 gpm or 5.7 L/min at 60 psi
Flow pressure	15-72.5 psi
Max pressure	120 psi
Max temperature	176 °F or 80 °C
Max deck thickness	2-1/8" (54mm)
Inlet connection	3/8" comp

# Installation Instructions

- Shut off cold and hot water supply.
- Ensure on the mounting surface, faucet hole should be 1-1/2"(38mm) in diameter. The center of hole should be at least 3-1/8" (78mm) away from the back wall.
- For installation of faucet directly onto mounting surface, ensure O-ring (#11) is in place under faucet body (#1). For installation with escutcheon (#12) or deck plate (#13), remove O-ring (#11) before fitting escutcheon(#12) or deck plate(#13) under faucet body (#1)
- Place faucet body (#1) on the mounting surface by feeding flex hoses(#20) and brass tubes through faucet hole.
- Fit washer (#14), spacer (#15) and mounting bracket (#16) with thread tube (#10). Insert rod (#9) through holes of thread tube (#10)
- Push connector (#18) with spray hose (#22) into brass tube and then tighten the nut (#17) with an adjustable wrench.
- With washer (#23) in place, screw spray head (#24) into spray hose (#22).
- Slide spring (#27) onto spray hose (#22) from below.
- With washer (#19) in place, screw connector (#18) onto spray hose (#22) and tighten with an adjustable wrench.
- Turn on faucet, water will always come from the aerator (#26). Push diverter button (#25) to switch to spray.

# Care & Maintenance Instructions

SSI products are designed and engineered under strict quality standards. Regular and proper care of our products will ensure years of trouble-free service.

## For Cartridge:

- Shut off cold and hot water supply.
- Pull out the decorative cap (#7) and with an Allen wrench (#8) loosen the set screw (#6) but do not remove it.
- Pull off handle (#5), unscrew cap (#4) by hand and remove retaining nut (#3) using an adjustable wrench.
- Remove cartridge (#2).
- Wash the cartridge (#2) with clean running water and ensure that any trapped debris has

been removed. Dry and lightly grease the seals (use only NSF approved silicone grease).

Note: If spacer (#15) is omitted, deck thickness can be increased by 5/8"(16mm) to a total of 2-1/8"(54mm).

- Replace cartridge (#2), retaining nut (#3) and cap (#4) followed by handle (#5).
- For Aerator:
- Regularly remove and wash aerator (#26) with clean running water and ensure that any trapped debris has been removed.
- For Surface Finish:
- To clean, use a soft and damp cloth with warm soapy water followed by rinsing with clean water and drying with a soft cloth. Do not use abrasive or harsh cleaners as they may result in finish damage.