

Limited Lifetime Faucet Warranty

Fluid™ warrants its faucets to be free from defects in material and workmanship for as long as the original consumer/purchaser/owner owns his or her home.* Plastic and rubber components are warranted for a period of two years. This warranty applies only to original installation locations. If a defect is found in normal residential use, Fluid™ will, at its election, repair, provide a replacement part or product, or make the appropriate adjustment. Fluid™ reserves the right to examine the product in question and its installation prior to replacement. This warranty is limited to replacement of defective parts only. Damage to a product caused by accident, improper installation, misuse or abuse, improper care of finishes, hard water or mineral deposits, potassium or salt based water softener systems or exposure to corrosive materials is not covered by this warranty. Improper care and cleaning will void the warranty.** Replacement parts can be obtained from your local dealer or directly from the Fluid™ warehouse, (shipping charges may apply). Dated proof of purchase must accompany all warranty claims. This warranty applies only to Fluid™ faucets installed in the United States of America, Canada or Mexico (North America). Fluid™ recommends using a certified plumber for faucet installation and repair. Incidental and consequential damages, labor charges, repair or replacement costs are expressly excluded. In no event shall the liability of Fluid™ exceed the purchase price of the faucet. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. This warranty gives you specific legal rights which vary from state/province to state/province. If you find any such problem with your product, please immediately contact your nearest Fluid™ dealer or sales representative.

fluid |

ssi[™]
SUSTAINABLE
SOLUTIONS
INTERNATIONAL

Need Help?

For additional assistance
Toll Free: 1 800 460 7019
Fax: 1 604 430 5050
help@sustainablesolutions.com
www.sustainablesolutions.com

Installation Instructions for Pull Down Kitchen Faucet with Magnetic Spray Head

* Two year warranty on commercial applications.

** Never use cleaners containing abrasive cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for surface finish. This will void the warranty.

This faucet meets or exceeds the following standards:

ASME A112.18.1 / CSA B125.1 / NSF61-9

AB1953 California Lead Plumbing Law Certified

This product has been tested and certified by IAPMO.



SSI[™]
SUSTAINABLE
SOLUTIONS
INTERNATIONAL

Sustainable Solutions International
Phone: 1 800 460 7019
www.SustainableSolutions.com

IAPMO LISTED


Pull Down Kitchen Faucet w/ Magnetic Spray Head / 2018 / Vo

Please Keep This Manual For Future Reference

Tools Required for Installation

-  Allen Wrench (supplied)
-  Phillips Screwdriver
-  Teflon Tape
-  Adjustable Wrench

- Specifications:
- Max flow 1.5 gpm or 5.7 L/min
 - Flow pressure 15-72.5 psi at 60 psi
 - Max pressure 120 psi
 - Max temperature 176 F or 80 C
 - Max deck thickness 1-3/4" (45mm)
 - Inlet connection 3/8" comp
 - Spout rotation 360 degree

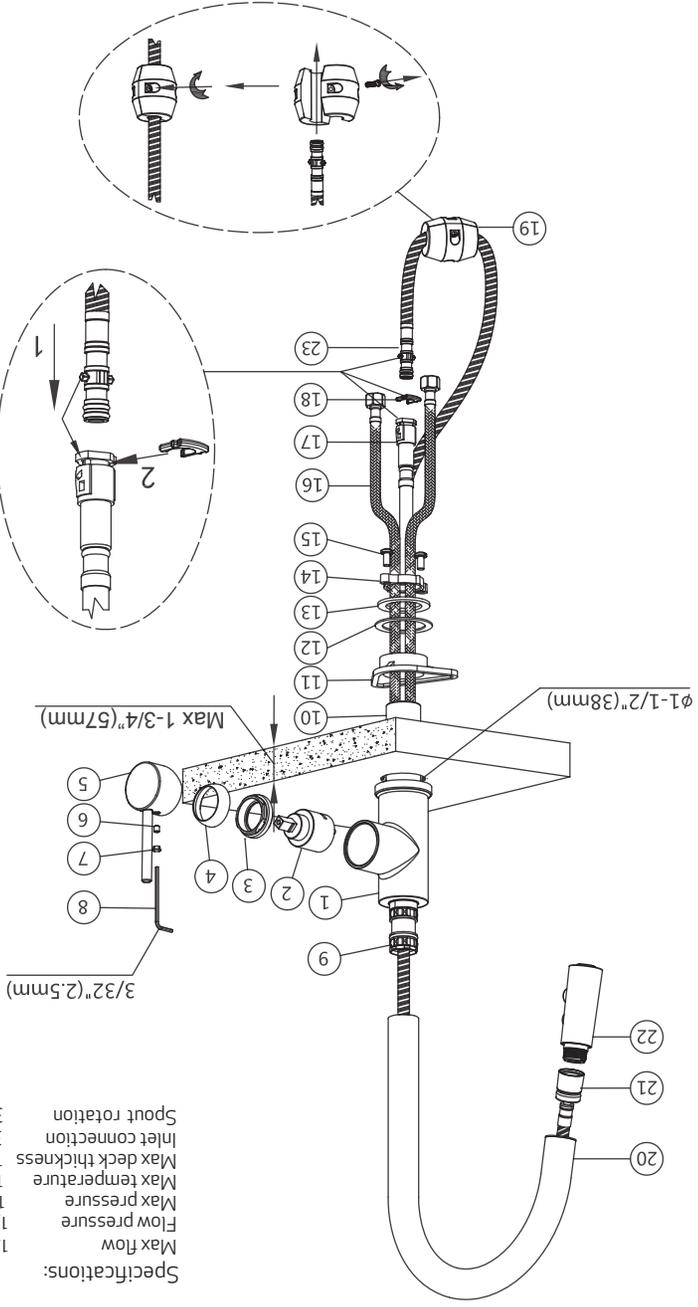

Installation Instructions

1. Shut off cold and hot water supplies.
 2. On mounting surface the faucet hole should be 1-1/2" (38 mm) in diameter. The maximum deck thickness should be 1-3/4" (45mm).
 3. Feed spray hose (#21) with attached spray head (#22) through goose-neck spout (#20) and faucet body (#1), then loosely place goose-neck spout (#20) onto connector (#9).
 4. Rotate goose-neck spout (#20) so that the hole located at the bottom of goose-neck spout (#20) is in alignment with the raised dot located on the last plastic ring on the connector (#9). Once aligned, push the goose-neck spout (#20) onto the connector (#9) until it snaps into place.
 5. From above, place faucet body (#1) on the mounting surface by feeding the spray hose (#21), the braided flex hoses (#16) and quick connector (#17) through faucet hole on the mounting surface.
- NOTE: If spacer (#11) is omitted, mounting gasket (#12) and metal gasket (#13) onto mounting tube (10).
6. From below, fit spacer (#11), rubber gasket (#12) and metal gasket (#13) onto deck thickness can be increased by 5/8" (16mm) to a total of 2-1/4" (57mm).
 7. Thread mounting plate (#14) onto the mounting tube (#10) by hand tightening to secure the spacer (#11), rubber gasket (#12) and metal gasket (#13) up against the bottom of the mounting surface. Tighten two attached screws (#15) with a Phillips screwdriver.
 8. Push the end of spray hose (#23) into quick connector (#17), then secure with the supplied C-clip (#18) in the slot.
- NOTE: Refer to the supplied installation Warning in the plastic bag of C-clip.
9. Attach the weight (#19) onto the lowest position of spray hose (#21) and secure it by tightening 2 attached screws with a Phillips screwdriver.

Care & Maintenance Instructions

Fluid™ products are designed and engineered under strict quality standards. Regular and proper care of our products will ensure years of trouble-free service.

For Cartridge:

1. Shut off cold and hot water supplies.

For Spray Aerator:

6. Replace cartridge (#2), retaining nut (#3) and cap (#4) followed by handle (#5), then retighten set screw (#6), insert plug (#7).
- Regularly unscrew spray head (#22) from the spray hose (#21). Wash surface of spray head (#22) with clean running water and ensure any trapped debris and deposits have been removed.
- For Surface Finish:

4. Pull off cartridge (#2) by hand.
 5. Wash cartridge (#2) with clean running water and ensure that any trapped debris all rubber seals (use only NSF approved Silicone grease).
- Clean with a damp cloth and warm soapy water. Then simply rinse off and wipe dry with a soft cloth. Do not use abrasive or harsh cleaners as they may result in finish damage.