fluid Innovative fixtures for life

SPECIFICATIONS

Customer Service: 1-800-460-7019
www.fluidfaucets.com

Sustainable Solutions

Specifications
- Metal construction for durability and reliability
- Pressure balancing volume control with 2-way diverter with shut off or sharing
- Max-temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- 3 function hand shower and slide rail with wall outlet
- 8” round rain shower head with 16” shower arm
- Requires pressure balancing valve with shut off F1012B or F1012B-PEX or F1012B-PEX-W or pressure balancing valve with sharing F1012B-SHARE or F1012B-SHARE-PEX or F1012B-SHARE-PEX-W
- Valve package and trim package sold separately

Finish
- MB (Matte Black)

Flow Rate
- Shower head 1.8 gpm @ 60 psig
- Hand shower 1.8 gpm @ 60 psig

Codes and Standards
- ANSI/ASME A112.18.1
- CSA B125.1
- IAPMO / cUPC Listed

Warranty
- Limited Lifetime Warranty against material and manufacturing defects for residential use. 5 year limited warranty on black finish.
- 2 Year Limited Warranty on all industrial, commercial and business applications.

fluid Citi Series
Shower Head and Hand Shower Trim Kit
Model: F242025TMB

Includes
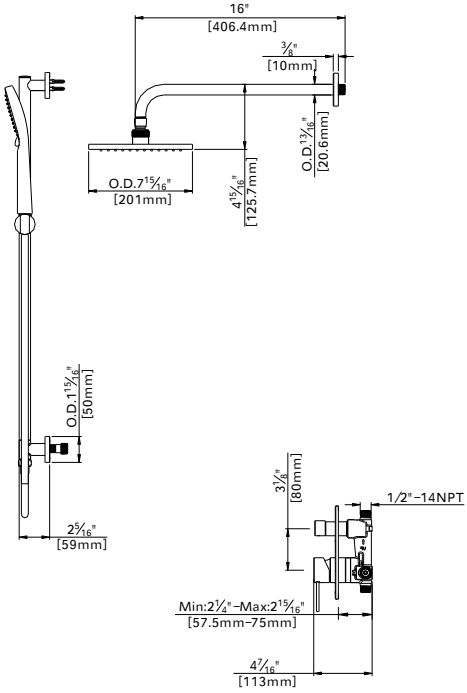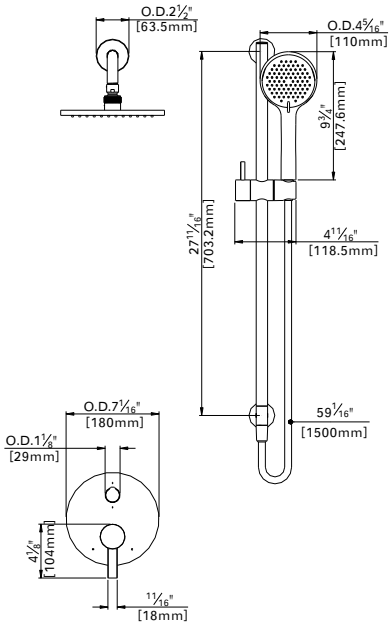
F1001TMB	Sleeve Tub and Cap
FP801013MB	Diverter Sleeve Tube
FP6001142MB-2PB	Round Cover Plate
FP6024041MB	Citi Handle
FP605652	Round Diverter Handle
FP6006008MB	16” Round Shower Arm
FP6002150MB	8” Round Shower Head
FA802MB	Slide Rail with Wall Outlet
FP40130MB	3 Function Hand Shower
FP6001007MB	60” Shower Hose