fluid Innovative fixtures for life SPECIFICATIONS

Customer Service: 1-800-460-7019 www.fluidfaucets.com

Sustainable Solutions

Specifications

- Metal construction for durability and reliability
- Pressure balancing volume control .
- Max-temperature limit stop for added safety .
- Integral stop check valves for easy maintenance .
- Switch retro-fit slide rail with 2 way diverter
- 3 function hand shower .
- . 8" square rain shower head and 16" shower arm
- Requires pressure balancing valve F1001B or F1001B-PEX or F1001B-PEX-W
- Valve and trim packages are sold separately

Finish

MB (Matte Black)

Flow Rate


- Hand shower 1.8 gpm @ 60 psig .
- Shower head 1.8 gpm @ 60 psig

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1 .
- IAPMO / cUPC

Warranty

- Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
- 2 Year Limited Warranty on all industrial, commercial and business applications.

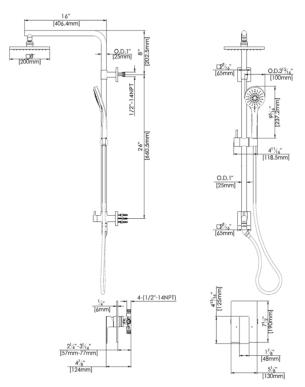

fluid Quad Series Shower Head and Hand Shower **Trim Kit** Model: F161015TMB

Includes: F1001TMB FP6001033MB-1PB FP6016041MB FP933001MB FP900216MB FP40130MB FP6001150MB FP6001007MB

Sleeve Tube and Cap Square Cover Plate Quad Handle Switch Main Shower Body 16" Shower Arm for Switch 3 Function Hand Shower 8" Square Shower Head 60" Shower Hose



