

SPECIFICATIONS

Customer Service: 1-800-460-7019 www.fluidfaucets.com

Specifications

- Metal construction for durability and reliability
- Pressure balancing with built-in 2-way diverter ceramic cartridge ensures anti-scald operation with lifelong trouble free service
- Single lever handle operation allows flow diverting and temperature control
- 4" square shower head and 8" shower arm
- Curved tub spout with slip fit connection, (includes a removable escutcheon, not pictured)
- Requires pressure balancing valve F1002B or F1002B-PEX or F1002B-PEX-W
- Valve and trim packages are sold separately

Finish

MB (Matte Black)

Flow Rate


- Shower head 1.8 gpm @ 60 psig
- Tub spout 4.5 gpm @ 60 psig

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- ADA
- IAPMO / cUPC Listed

Warrantv

- Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
- 2 Year Limited Warranty on all industrial, commercial

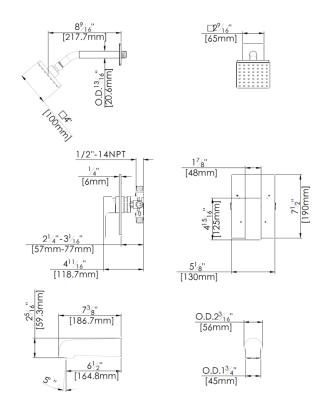

fluid Quad Series Shower Head and Tub Spout Trim Kit

Model: F164112TMB

Includes
F1001TMB Sleeve Tub and Cap
FP6016041MB Quad Handle
FP6001033MB-2PS Square Cover Plate
FP6027008MB 8" Shower Arm

FP10130MB 4" Square Shower Head FP6098035LMB Curved Tub Spout









