fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- > Valve and trim packages are sold separately
- → Requires the fluid F1001B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-1PB	Round Cover Plate
FA101	Slide Bar
FP40120	3 Function Hand Shower
FP6082048	Wall Outlet
FP6098034L	Diverting Tub Spout
FP6001006	60" Shower Hose

Features:



 $Requires\,F1001B$



Bubble Level



Integral Stops



Slip Fit Connection

Yaletown Tub & Hand Shower On Slide Bar

F191238T




Available in Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F191238T

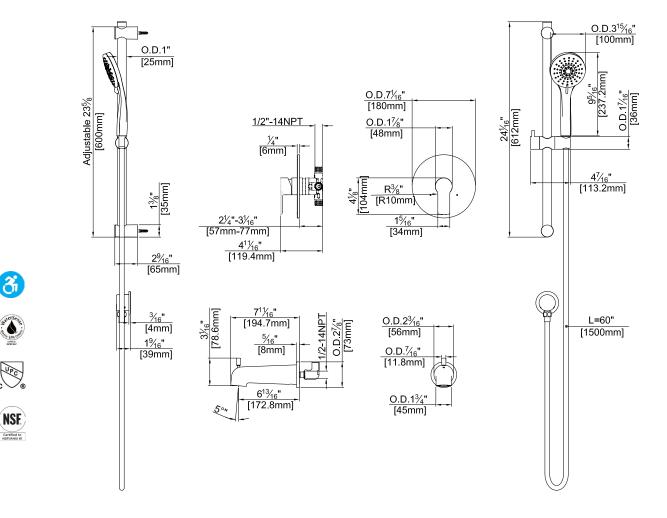

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed EPA Watersense Listed

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F191238T-15**