fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- → Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-2PB	Square Cover Plate
FP6016008	8" Shower Arm
FP6000350	6" Shower Head
FP40120	3 Function Hand Shower
FA802	Slide Bar With Integral Outlet
FP6001006	60" Shower Hose*

* Matte Black kits feature the FP6001007MB Shower Hose


**sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F192028T-AS**



Features:







Speed Connect

Yaletown Rain Shower & Hand Shower on Slide Bar Trim Kit

F192028T




Polished Chrome (CP), Brushed Nickel (BN) and *Matte Black (MB)



fluid

Technical Drawing

F192028T

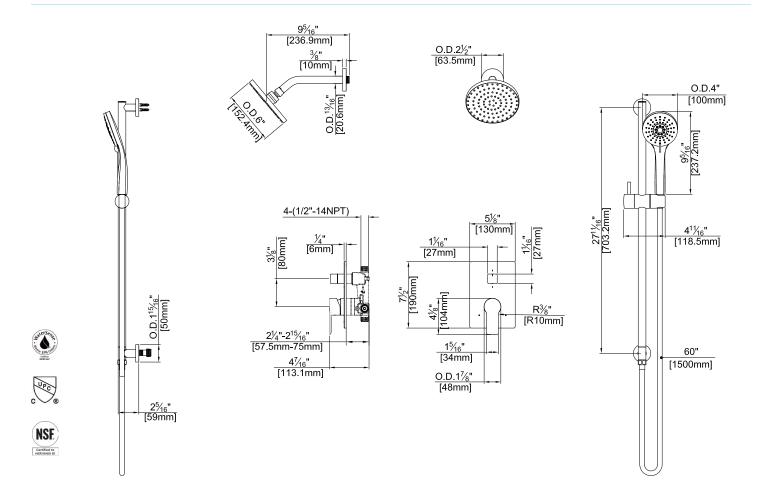

 $\textbf{Codes and Standards:} \ \, \text{ANSI/ASME A} 112.18.1, \ \, \text{CSAB} 125.1, \ \, \text{IAPMO/cUPCListed}, \ \, \text{EPA Watersense Listed}$

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F192028T-AS

Kit with round style cover plate & diverter handle: **F192028-R**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F192028T-15**

F192028T July 2023