fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 3-way, two handle diverting
- Maximum temperature limit stop for added safety
- > Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- → Requires the fluid F1003B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-3PB	Square Cover Plate
FP6018008	6" Ceiling Shower Arm
FP6002150	8" Shower Head
FP40120	3 Function Hand Shower
FA802	Slide Bar With Integral Outlet
FP6001006	60" Shower Hose
FP6095035	Slim Tub Spout

**sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F193009T-AS**



Yaletown Tub, Ceiling Shower & Hand Shower on a Slide Bar

F193009T



Features:



Requires F1003B



Bubble Level



Integral Stops




Speed Connect

Available in Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F193009T

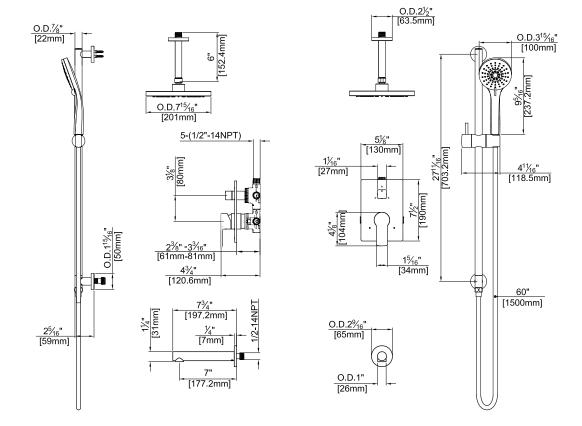

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F193009T-AS

Kit with round style cover plate & diverter handle: **F193009T-R**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F193009T-15**

F193009T July 2023