

Yaletown Hand Shower on Slide Rail Trim Kit

F191011T

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Valve and trim packages are sold separately
- Requires the fluid F1001B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-1PB	Round Cover Plate
FA101	Slide Rail
FP6082048	Round Wall Outlet
FP40120	3-Function Hand Shower
FP6001006	60" Shower Hose*



Features:



Requires F1001B



Bubble Level



Integral Stops




Speed Connect

Polished Chrome (CP), Brushed Nickel (BN)

Technical Drawing

F191011T

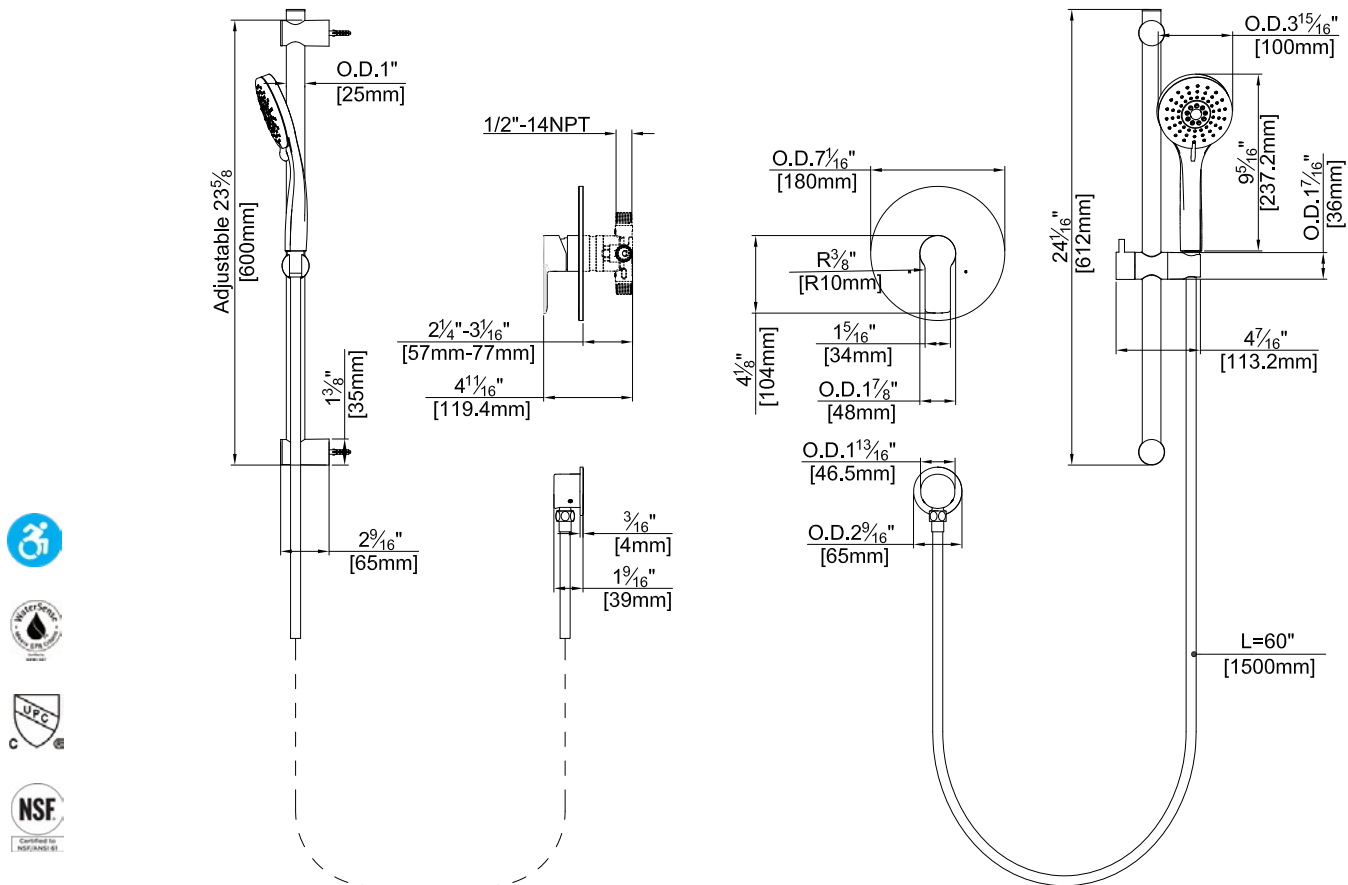

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
EPA Watersense Listed

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F191011T-15**