

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Valve and trim packages are sold separately
- Requires the fluid F1001B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-1PB	Round Cover Plate
FP900208	8" Switch Shower Arm
FP6000350	6" Shower Head
FP6001048	Round Hand Shower Wand*
FP933000	Switch Slide Bar
FP6001006	60" Shower Hose*

* Matte Black kits feature the FP6001007MB Shower Hose & FP6006048MB Round Shower Wand

Features:



Requires F1001B



Bubble Level



Integral Stops



Speed Connect

Yaletown Switch 6" Shower Head & 3 Function Hand Shower Kit


F191014T



Polished Chrome (CP), Brushed Nickel (BN) and *Matte Black (MB)

Technical Drawing

F191014T

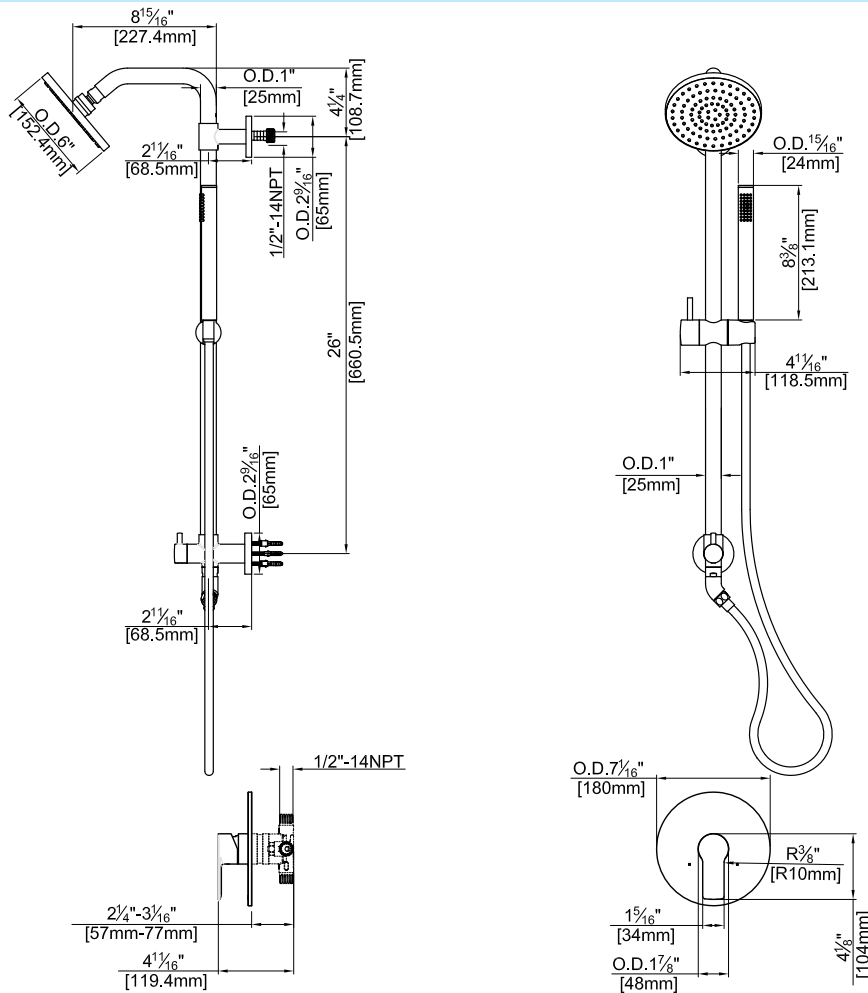

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO/cUPC Listed, EPA Watersense Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with square valve trim:

F191014T-S

Kit with 8" tall shower arm:

F191014T-TALL

Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm:

F191014T-15