fluid Innovative fixtures for life SPECIFICATIONS

Specifications

- Metal construction for durability and reliability
- Pressure balancing volume control with 3-way diverter with shut off or sharing
- Max-temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- 3 function hand shower and slide rail with wall outlet
- 6" square shower head and 8" shower arm
- Sloped tub spout with fluid speed connection
- Requires pressure balancing valve with shut off F1003B or F1003B-PEX or F1003B-PEX-W OR
- Requires pressure balancing valve with sharing F1003B-SHARE or F1003B-SHARE-PEX or F1003B-SHARE-PEX-W
- Valve and trim packages are sold separately

Finish

- CP (Polished Chrome)
- BN (PVD Brushed Nickel)

Flow Rate

- Shower Head 1.8 gpm @ 60 psig
- Hand Shower 1.8 gpm @ 60 psig

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- IAPMO / cUPC Listed

Warranty

- Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
- 2 Year Limited Warranty on all industrial, commercial and business applications.


fluid Oceanside Series Shower Head, Hand Shower and Tub Spout Trim Kit Model: F233127T

10

Includes: F1001T FP801013 FP6001143-3PB FP605752 FP6023041 FA803 FP40120 FP6001006 FP6027008 FP6000150 FP6054034

Sleeve Tube and Cap Diverter Sleeve Tube Square Cover Plate Square Diverter Handle Oceanside Handle Slide Rail with Wall Outlet 3 Function Hand Shower 60" Shower Hose 8" Shower Arm 6" Square Shower Head Sloped Tub Spout

FP6000150 FP6054034

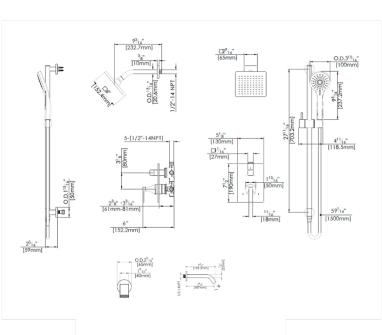



Sustainable Solutions