fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way two handle diverting
- Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6023041	Oceanside Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-2PB	Square Cover Plate
FP6007008	16" Shower Arm
FP6001050	8" Brass Rain Shower Head*
FP6054034	. SlopedTub Spout

Oceanside Rain Shower Head & Tub Spout Trim Kit










Kit with Alternate ADA Diverter Handle: **F232212T-AS**



Features:



Bubble Level

Integral Stops

Speed Connect

Polished Chrome (CP), Brushed Nickel (BN)


fluid by Sustainable Solutions

8395 Riverbend Court, Burnaby, BC V3N 5E7, Canada

F232212TT Sept, 2023

fluid

Technical Drawing

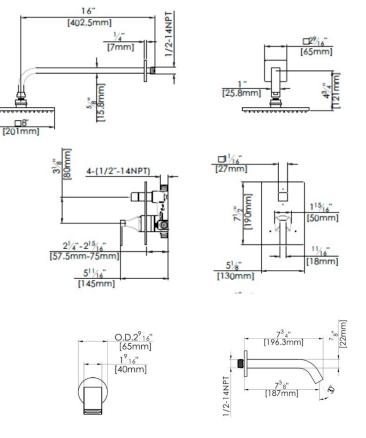

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Warranty:

20

NSE

Certified to NSF/ANSI 61

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle: F232212T-AS

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head @ 1.5 gpm: F232212T-15

fluid by Sustainable Solutions

8395 Riverbend Court, Burnaby, BC V3N 5E7, Canada

F232212T Sept. 2023

F232212T