fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	. Sleeve tube and cap
FP6018041	Utopia Handle
FP801013	. Diverter Sleeve
FP605752	. Diverter Handle
FP6001143-2PB	. Round Cover Plate
FP6016008	.8" Shower Arm
FP6000350	. 6" Shower Head
FP40120	. 3 Function Hand Shower
FA802	. Slide Bar With Integral Outlet
FP6001006	. 60" Shower Hose


**sharing available where allowed by code

Kit with Alternate Handle: F182028T-AR



Features:





Integral Stops

Speed Connect

Utopia 6" Shower Head & 3 Function Hand Shower Trim Kit

F182028T





Available in Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F182028T

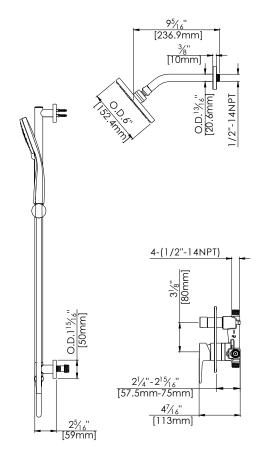

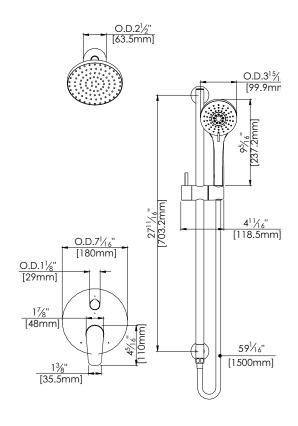







Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Shower Head @ 1.5 gpm: **F182028T-15**