fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	. Sleeve Tube and Cap
FP6028341	. Wisdom Handle
FP80101	. Diverter Sleeve
FP605652	. Diverter Handle
FP6001142-2PB	. Cover Plate
FP6016008	. 8" Shower Arm
FP6000350	. 6" Shower Head
FP40120	. 3 Function Hand Shower
FA105	. Brass Slide Bar
FP6002047	. Wall Outlet
FP6001006	. 60″ Shower Hose

sharing available where allowed by code Kit with Alternate Handle: **F282007T-AR



Features:

ິ Requires F1012B

📼 Bubble Level

Integral Stops

Speed Connect

Wisdom Shower Head & Hand Shower Trim Kit on Slide Bar






Available in Polished Chrome (CP) and Brushed Nickel (BN)

F282007T September 2023

fluid

Technical Drawing

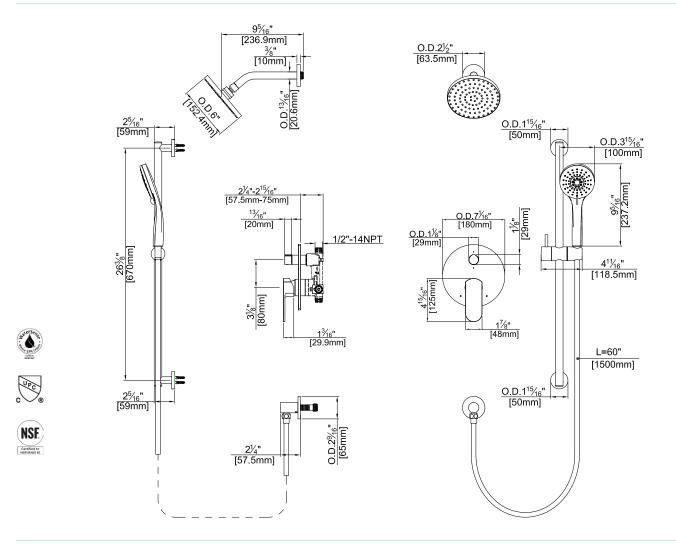

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F282007T-15**

F282007T