Innovative fixtures for life.

fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T FP6028341	
	. Diverter Sleeve Diverter Handle
FP605652 FP6001142-2PB	
FP6016008	8" Shower Arm
FP10200	. 4" Eco Shower Head
FP6016008	. 8″ Shower Arm
FP6001048	. Round Hand Shower
FA105	. Slide Bar
FP6002047	. Wall Outlet
FP6001006	. 60" Shower Hose

sharing available where allowed by code Kit with Alternate Handle: **F282012T-AR

Features:

i Requires F1012B

📼 Bubble Level

Integral Stops

Speed Connect

Wisdom 4" Eco Shower Head & Hand Shower Trim Kit

F282012T




Available in Polished Chrome (CP) and Brushed Nickel (BN)


fluid

Technical Drawing

F282012T

pg 2.

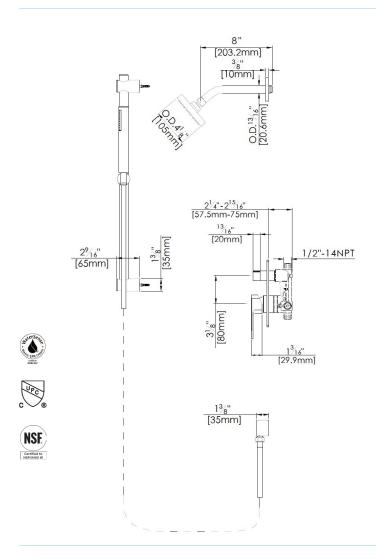

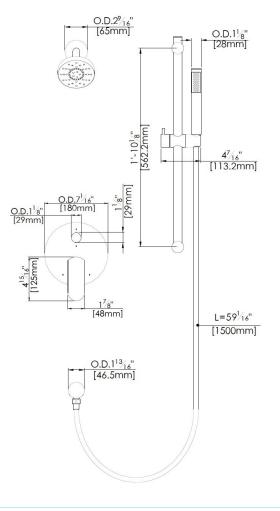

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.5 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F282012T-15**

