fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- → Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:


F1001T	. Sleeve Tube and Cap
1 10011	Steeve Tube and Cap
FP6028341	Wisdom Handle
FP801013	. Diverter Sleeve
FP605752	. Diverter Handle
FP6001143-2PB	Round Cover Plate
FP6016008	8" Shower Arm
FP6000350	6" Shower Head
FP40120	3 Function Hand Shower
FA802	. Slide Bar With Integral Outlet
FP6001006	. 60" Shower Hose*

* Matte black uses an FP6001007MB Shower Hose

***sharing available where allowed by code Kit with Alternate Handle: **F282028T-AR**




Features:





Integral Stops



Wisdom 6" Shower Head & 3 Function Hand Shower Trim Kit

F282028T





Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)



Technical Drawing

F282028T

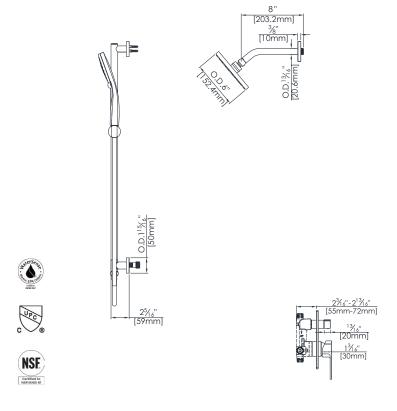

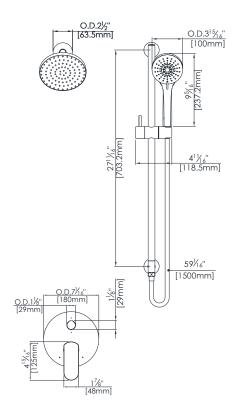

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Shower Head @ 1.5 gpm: **F282028T-15**