fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6028341	Wisdom Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Round Cover Plate
FP40120	3 Function Hand Shower*
FA802	Slide Bar with Integral Outlet
FP6001006	60" Shower Hose*
FP6057034	Pipe Tub Spout


The FP6001007MB Shower Hose & FP40130MB 3
 -Function Hand Shower are utilized in the F282074TMB
 Matte Black shower kit.

Kit with Alternate Handle: F282074T-AR




Features:





Integral Stops



Wisdom Tub & Hand Shower Trim Kit with FA802 Slide Bar

F282074T




Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

fluid

Technical Drawing

F282074T

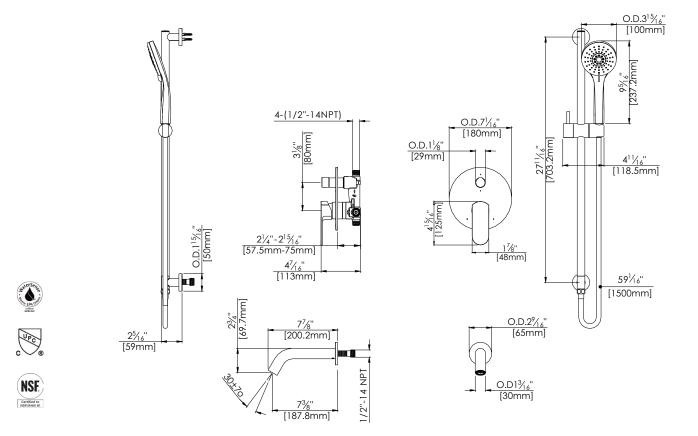

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F282074T-15**