

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, diverter with shut off or sharing
- Max-temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6028341	Wisdom Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Round Cover Plate
FP20100	5 Function Shower Head
FP6016008	8" Shower Arm
FP6041034	Wisdom Tub Spout

Kit with Alternate Handle: **F282305T-AR**



Wisdom Tub & 5 Function Shower Trim, (Two handle)

F282305T



Features:



Requires F1012B



Bubble Level



Integral Stops




Speed Connect

Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

Technical Drawing

F282305T

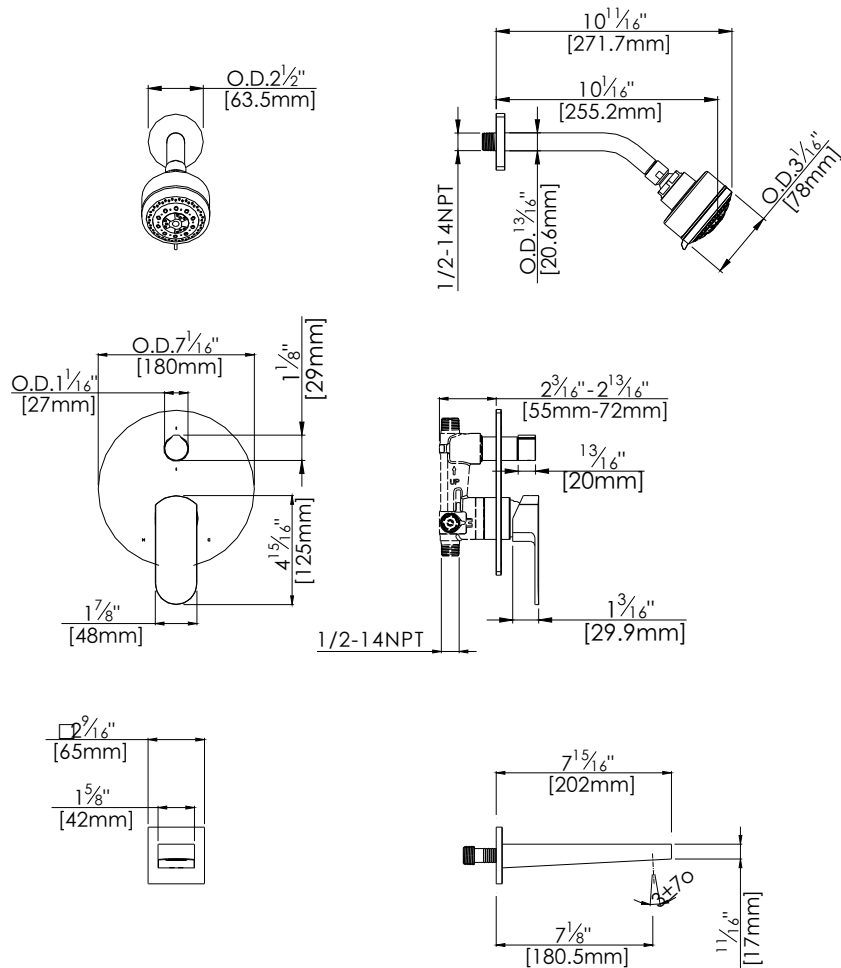

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head @
1.5 gpm: **F282305T-15**