fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 3-way, two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1003B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6028341	Wisdom Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-3PB	Round Cover Plate
FP6016008	8" Shower Arm
FP6000350	6" Shower Head
FP40120	3 Function Hand Shower
FA802	Slide Bar With Integral Outlet
FP6001006	60" Shower Hose
FP6041034	Wisdom Tub Spout

**sharing available where allowed by code
Kit with Alternate Handle: **F283027T-AR**



Features:



Requires F1003B



Bubble Level



Integral Stops



Speed Connect

Wisdom Tub, 6" Shower & 3 Function Hand Shower Trim Kit

F283027T




Polished Chrome (CP), Brushed Nickel (BN)

fluid

Technical Drawing

F283027T

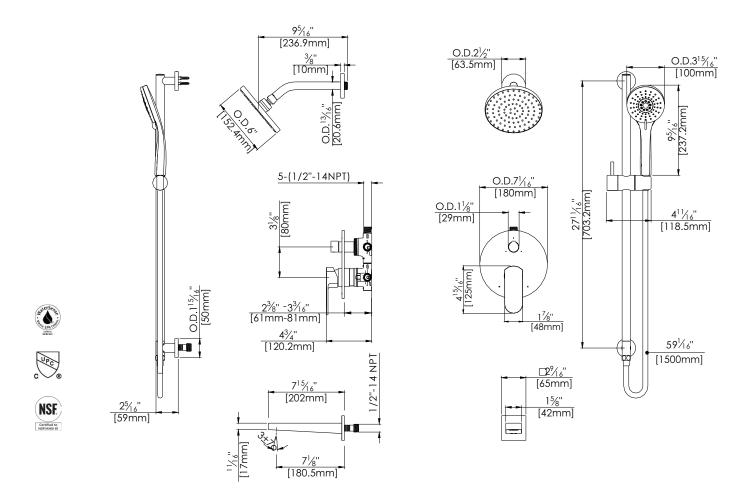

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Shower Head @ 1.5 gpm: **F283027T-15**