

Specifications

- ➔ Heavy forged brass construction for durability and reliability
- ➔ Pressure balancing ceramic cartridge ensures anti-scald operation and life-long trouble-free service
- ➔ German made Fluhs brass ceramic 3-way diverter cartridge
- ➔ Single lever handle operation allows both volume and temperature control
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop valves for easy maintenance
- ➔ Dual inlet and outlet ports – 1/2" CxC soldering & 1/2" NPT thread
- ➔ Adjustable installation depth from 2 3/8" (60mm) to 3 1/8" (79mm)
- ➔ Mud guard is provided to help protect valve from dust and debris during installation
- ➔ Bubble level is attached to mud guard for easy and level installation
- ➔ Compliant to Cal Green requirement with a minimum transitional flow
- ➔ A wide selection of complimentary trims are sold separately

Codes and Standards

- ➔ ANSI/ASME A112.18.1
- ➔ CSA B125.1
- ➔ IAPMO/cUPC Listed



Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Flow Rate:

- ➔ 5.5 gpm @ 60 psig

Features:



Heavy Brass



Integral Stops





Ceramic Disc Cartridge



Bubble Level

Pressure Balancing Three Way Valve (Two Handle)

F1003B

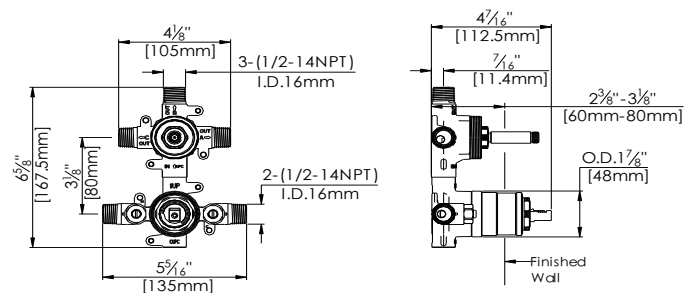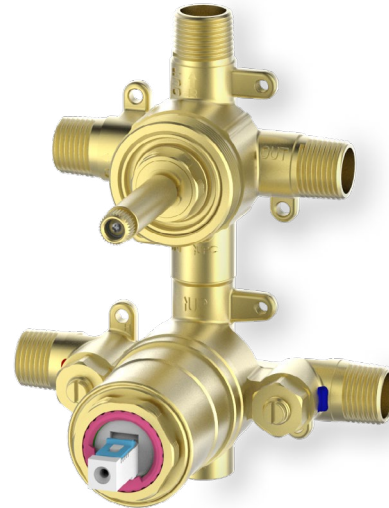

Forged from Heavy Brass

Models Available:

- ➔ **Solder/NPT:** F1003B
- ➔ **PEX:** F1003B-PEX
- ➔ **PEX-W:** F1003B-PEX-W

Models Available with Sharing:*

- ➔ **Solder/NPT:** F1003B-SHARE
- ➔ **PEX:** F1003B-PEX-SHARE
- ➔ **PEX-W:** F1003B-PEX-W-SHARE

*Note: The F1012B is available with sharing.