

Specifications

- Heavy forged brass construction for durability and reliability
- Pressure balancing ceramic cartridge ensures anti-scald operation and life-long trouble-free service
- Single lever handle operation allows volume and temperature control
- Two-way ceramic diverter cartridge
- Max-temperature limit stop for added safety
- Integral check stops for easy maintenance
- Inlet and Outlet ports - $\frac{1}{2}$ " CxC soldering & $\frac{1}{2}$ " NPT thread
- Adjustable installation depth from $2\frac{3}{16}$ " (55mm) to $2\frac{13}{16}$ " (72mm)
- Mud guard is provided to help protect valve from dust and debris during installation
- Bubble level is attached to mud guard for an easy and level installation
- A wide selection of decorative trims are sold separately
- Deep wall extension kit F-EXT1012 is available and sold separately

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- IAPMO / cUPC Listed



Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Flow Rate:

- 5.5 gpm @ 60 psig

Features:



Heavy Brass



Integral Stops






Ceramic Disc Cartridge



Bubble Level

Pressure Balancing Two Way Valve (Two Handle)

F1012B

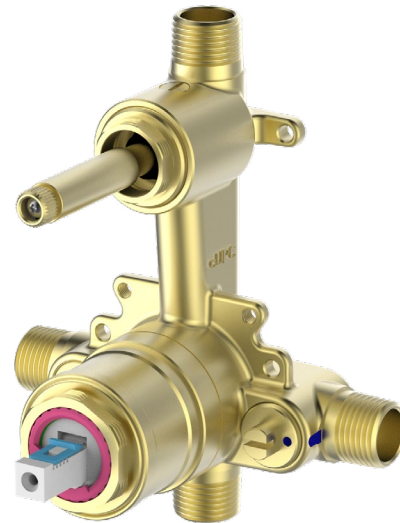

Forged from Heavy Brass

Models Available:

- **Solder/NPT:** F1012B
- **PEX:** F1012B-PEX
- **PEX-W:** F1012B-PEX-W

Models Available with Sharing*:

- **Solder/NPT:** F1012B-SHARE
- **PEX:** F1012B-PEX-SHARE
- **PEX-W:** F1012B-PEX-W-SHARE

*Note: The F1012B is available with sharing.