## fluid

## **Specifications:**

- → Metal construction for durability and reliability
- → Pressure balancing with 2-way single handle diverting and temperature control
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1002B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

### **Components:**

F1001T	.Cartridge Sleeve
FP6019041	. Yaletown Handle
FP6001035-2PS	.Round Cover Plate
FP6016008	.8" Shower Arm
FP20100	.5 Function Shower Head
FP6001048	.Round Hand Shower
FA101	.Slide Bar
FP6082048	. Wall Outlet
FP6001006	.60" Shower Hose

#### **Features:**



Requires F1002B



Bubble Level




Integral Stops

# Yaletown 5 Function Shower & Round Hand Shower on Slide Bar

F194103T




Available in Polished Chrome (CP) and Brushed Nickel (BN)



# fluid

## **Technical Drawing**

F194103T

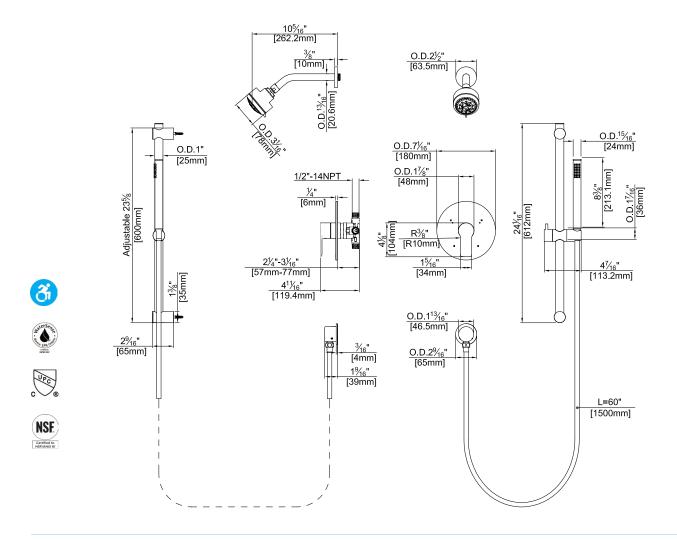

### **Warranty:**

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

### **Codes and Standards:**

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed EPA Watersense Listed

#### Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F194103T-15**