fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing with 2-way single handle diverting and temperature control
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1002B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX)

Components:

F1001TCartridge SleeveFP6019041Yaletown HandleFP6001035-2PSRound Cover PlateFP60160088" Shower ArmFP60003506" Shower HeadFP6057034Pipe Tub Spout

Yaletown 6" Shower Head & Tub Spout Trim Kit


F194108T







Features:



🧿 Bubble Level

Speed Connect

Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)


fluid by **Sustainable Solutions**

8395 Riverbend Court, Burnaby, BC V3N 5E7, Canada

F194108T March 2023

fluid

Technical Drawing

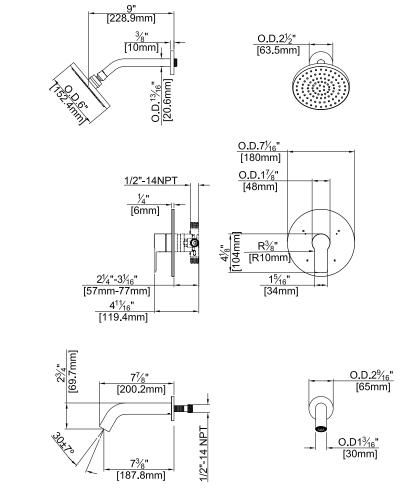

Warranty:

Siersen Berley

Jeo Beo Beo

NSE

Certified to NSF/ANSI 61

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed EPA Watersense Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Tub Spout 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head @ 1.5 gpm: F194108T-15

fluid by **Sustainable Solutions** 8395 Riverbend Court, Burnaby, BC

V3N 5E7, Canada

F194108T March 2023



F194108T