
# fluid

### **Specifications:**

- → Heavy brass construction for durability and reliability
- High arc swivel spout with 360 degree or 140 degree rotation with supplied stop
- Single handle operation allows both volume and temperature control
- → Kerox ceramic cartridge ensures life long trouble free service
- Quick and easy installation with top mounting system and quick hose connector
- Dual function brass spray head with spray and aerated flow
- → Limited to flow rate of 1.8 gpm (6.8 lpm) at 60 psi
- → Stainless steel flex supplies with <sup>3</sup>/<sub>8</sub>" comp. connection
- → Max deck thickness 1 ½" (38 mm) with spacer and 2 ½" (54 mm) without spacer
- → 1½" (38 mm) faucet hole size for drilling is recommended
- → 8" deck plate for 3 hole installation is available and sold separately
- → ADA Compliant

#### **Features:**



Pull Down Kitchen Spout

Magnetic Docking

Ceramic Disk Cartridge

Heavy brass construction

360 Degree Rotation with 140 Degree Lock


## Palm Pull Down Kitchen Faucet with Dual Function Head


F823



Polished Chrome (CP), Stainless Steel (SS)

Technical Drawing F823

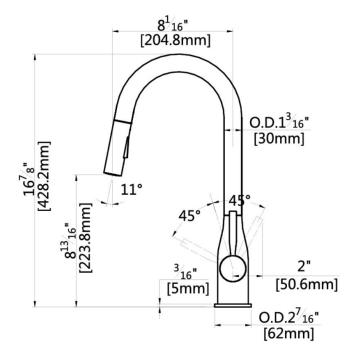

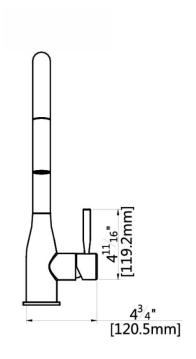









### **Warranty:**

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

### **Codes & Standards:**

ANSI/ASME A112.18.1 CSA B125.1 NSF/ANSI/CAN 61: Q < 1 NSF / ANSI / CAN372 IAPMO / cUPC Listed EPA Watersense Listed ADA Compliant

#### Flow Rate:

 $1.8 \, \text{gpm} \, (6.8 \, \text{lpm}) \, \text{at} \, 60 \, \text{psi}$ 

## **Low Flow Alternative** @1.5 gpm (5.7 lpm) **F823-15**