






Specifications:


- Metal construction for durability and reliability
- Angular swivel spout with 360 degree or 140 degree rotation with supplied stop
- Kerox ceramic cartridge ensures lifelong trouble free service
- Single handle operation, allows both volume and temperature control
- Quick and easy installation with quick hose connector
- Dual function spray head with spray and aerated flow
- Limited to a flow rate of 1.5 gpm (5.7 lpm) at 60 psi
- Maximum deck thickness of 1 3/4" with spacer and 2 1/2" (63 mm) without spacer
- 1 1/2" (38 mm) faucet hole size for drilling is recommended
- 8" deck plate for 3 hole installation is available and sold separately
- ADA Compliant

Features:

-  360 Degree Rotation with 140 Degree Lock
-  Dual Spray Kitchen Faucet
-  Ceramic Disk Cartridge
-  Pull Down Kitchen Spout
-  Metal construction

Dual Spray Pull Down Kitchen Faucet (Square Shaped Spout)


F829

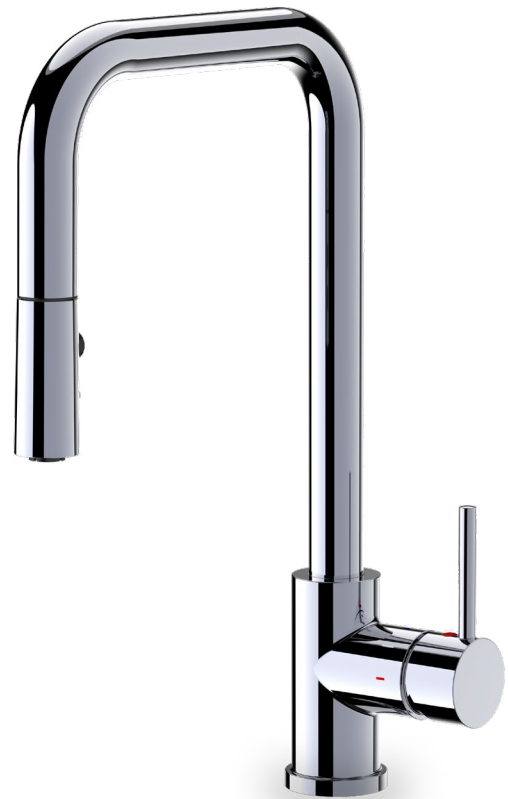

Polished Chrome (CP), Brushed Nickel (BN), Matte Black (MB)

Technical Drawing

F829

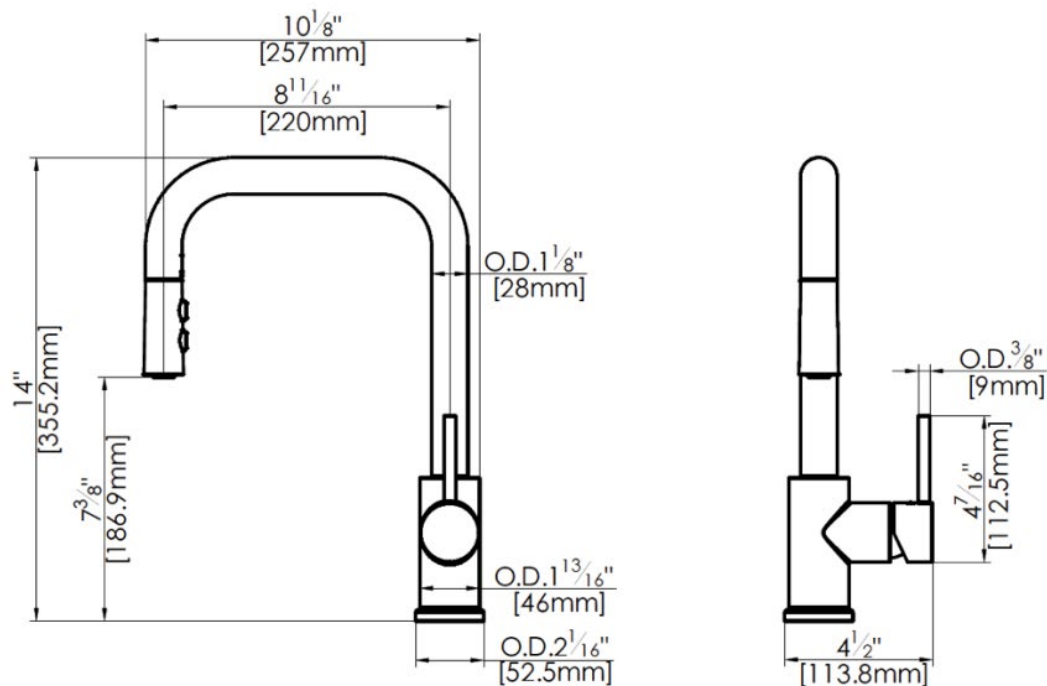**Warranty:**

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1
CSA B125.1
NSF/ANSI/CAN 61: Q < 1
NSF / ANSI / CAN372
IAPMO / cUPC Listed
EPA Watersense Listed
ADA Compliant

Flow Rate:

1 gpm, (3.8 lpm), @ 60 psig