fluid

Specifications:


- → Heavy brass construction for durability and reliability
- > Tubular spout design with 360 degree rotation
- Kerox ceramic cartridge ensures lifelong trouble free service
- Single handle operation, allows both volume and temperature control
- Quick and easy installation with top mounting system and quick hose connector
- Dual function spray head with spray and aerated flow
- → Limited to flow rate of 1.5 gpm (5.7 lpm) at 60 psi
- → Stainless steel flex supplies with ³/₈" comp. connection
- → 1½" (38 mm) faucet hole size for drilling is recommended
- Max. deck thickness 1 ½" (38 mm) with spacer and 2 ½" (54 mm) without spacer
- → Minimum 3 ½ (78 mm) distance from back splash wall
- → ADA Compliant

Wisdom Pull Down Dual Spray Kitchen faucet

F835



Features:






Pull Down Kitchen Spout


Ceramic Disk Cartridge

Heavy brass construction

Polished Chrome (CP), Brushed Nickel (BN), Matte Black (MB)

Technical Drawing F835

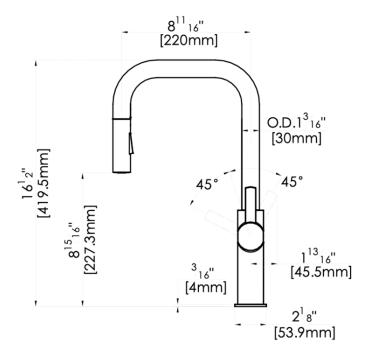











Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1 CSA B125.1 NSF/ANSI/CAN 61: Q < 1 NSF / ANSI / CAN372 IAPMO / cUPC Listed EPA Watersense Listed ADA Compliant

Flow Rate:

1.5 gpm, (5.7lpm), @ 60 psig