

## Quad Single Lever Vessel Bathroom faucet

F16002



### Specifications:






- Heavy brass construction
- Kerox ceramic cartridge ensures lifelong trouble free service
- 9-3/4" (248 mm) height from counter to spout, allowing for installation on vessel basins
- Single lever handle operation, allows both volume and temperature control
- fluid Eco-Care swivel aerator prevents splash back by allowing adjustment to the direction of water flow
- Flow restricted to 1.2 gpm, (4.6 lpm) at 60 psi
- Extra long flexible connection for easy installation
- Single-hole mounting with the supplied wrench tool
- 1-1/2" faucet hole size for drilling is recommended
- Includes the fluid Quick Clean waste pop-up drain, with removable basket
- ADA Compliant



**FA726**

Quick Clean Pop-Up  
with Overflow


### Features:

-  Removable Quick Clean Basket
-  Extra Long Supply Lines
-  Precision Ceramic Disc Cartridge
-  Brass Construction
-  Swivel Aerator to align water stream

Polished Chrome (CP), Brushed Nickel (BN)

## Technical Drawing

F16002

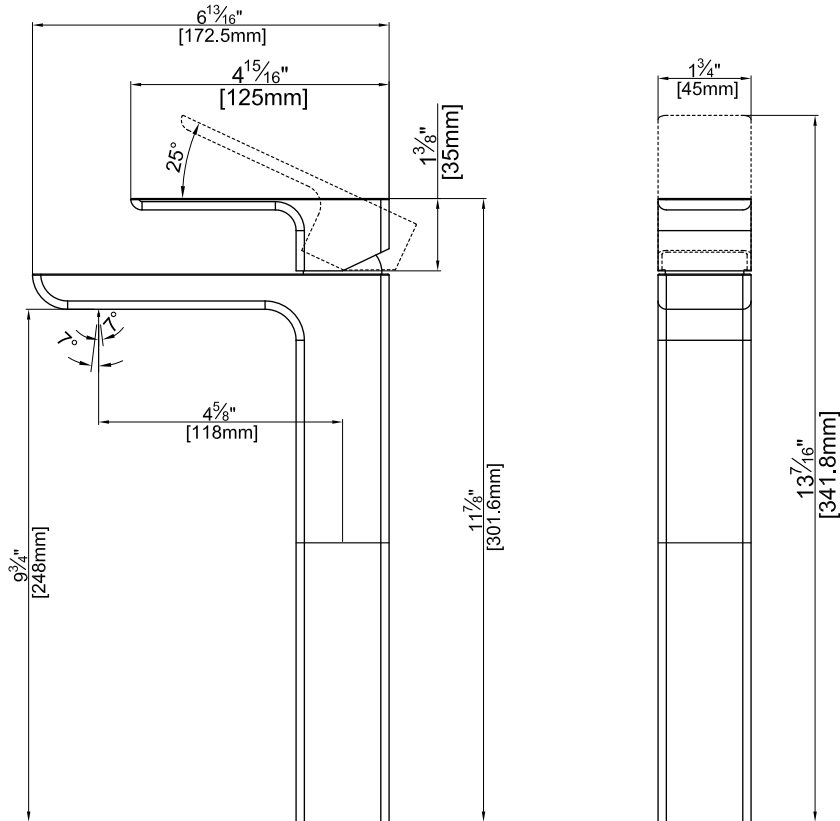

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

### Codes & Standards:

ANSI/ASME A112.18.1

CSA B125.1

NSF / ANSI / CAN372

IAPMO / cUPC Listed

EPA Watersense Listed

ADA Compliant

### Flow Rate:

1.2 gpm, (4.6 lpm), @ 60 psig

