Innovative fixtures for life.

fluid

Specifications:

- Metal construction
- Pressure balancing volume control with 2-way two handle diverting
- Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	. Sleeve Tube and Cap
FP801013	. Diverter Sleeve
FP601143-2PB	. Square Cover Plate
FP6007108	. Square Diverter Handle
FP6016041	. Quad Handle
FP6027008	. 8″ Shower Arm
FP10130	. 4" Shower Head
FP6004048	. Square Hand Shower
FA104	. Slide Bar
FP6001047	. Wall Outlet
FP6001006	. 60" Shower Hose



Features:

ÿ Requires F1012B

Integral Stops

📼 Bubble Level

Speed Connect

Quad 4" Shower Head & Hand Shower Trim Kit

F162012T




Available in Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F162012T

pg 2.

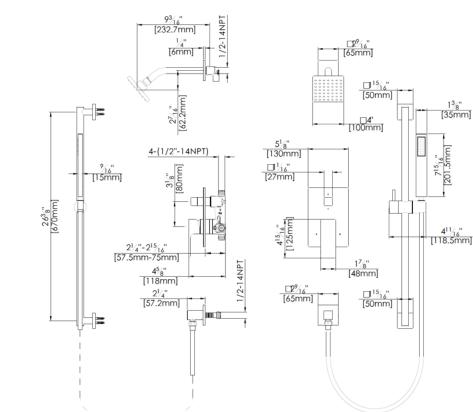



Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

1³/₈" [35mm]

Low Flow Alternative: Shower head and Hand Shower @ 1.5 gpm: F162012T-15

F162012T October 2023