

Specifications:

- Metal construction
- Pressure balancing volume control with 2-way, two handle diverting
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6016041	Quad Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-2PB	Square Cover Plate
FP6007108	16" Shower Arm
FP6001050	8" Brass Rain Showerhead*
FP40120	3 Function Hand Shower*
FA803	Slide Bar with Integral Outlet
FP6001006	60" Shower Hose*

**sharing available where allowed by code

Kit with Alternate Handle: **F162025T-AS**




Features:

- Requires F1012B
- Bubble Level
- Integral Stops
- Speed Connect

Quad 8" Rain Shower Head & Hand Shower Trim Kit

F162025T

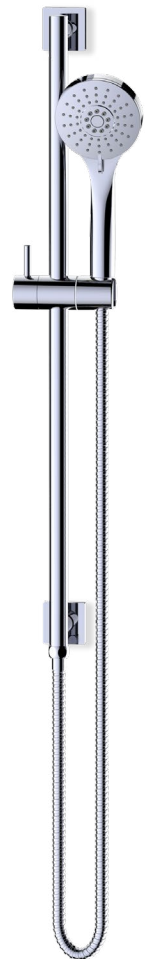


- * Matte Black: FP6001007MB Hose, FP40130MB 3 Function Hand Shower & FP6001150MB ABS 8" Shower Head

Polished Chrome (CP), Brushed Nickel (BN) & Matte Black (MB)

Technical Drawing

F162025T

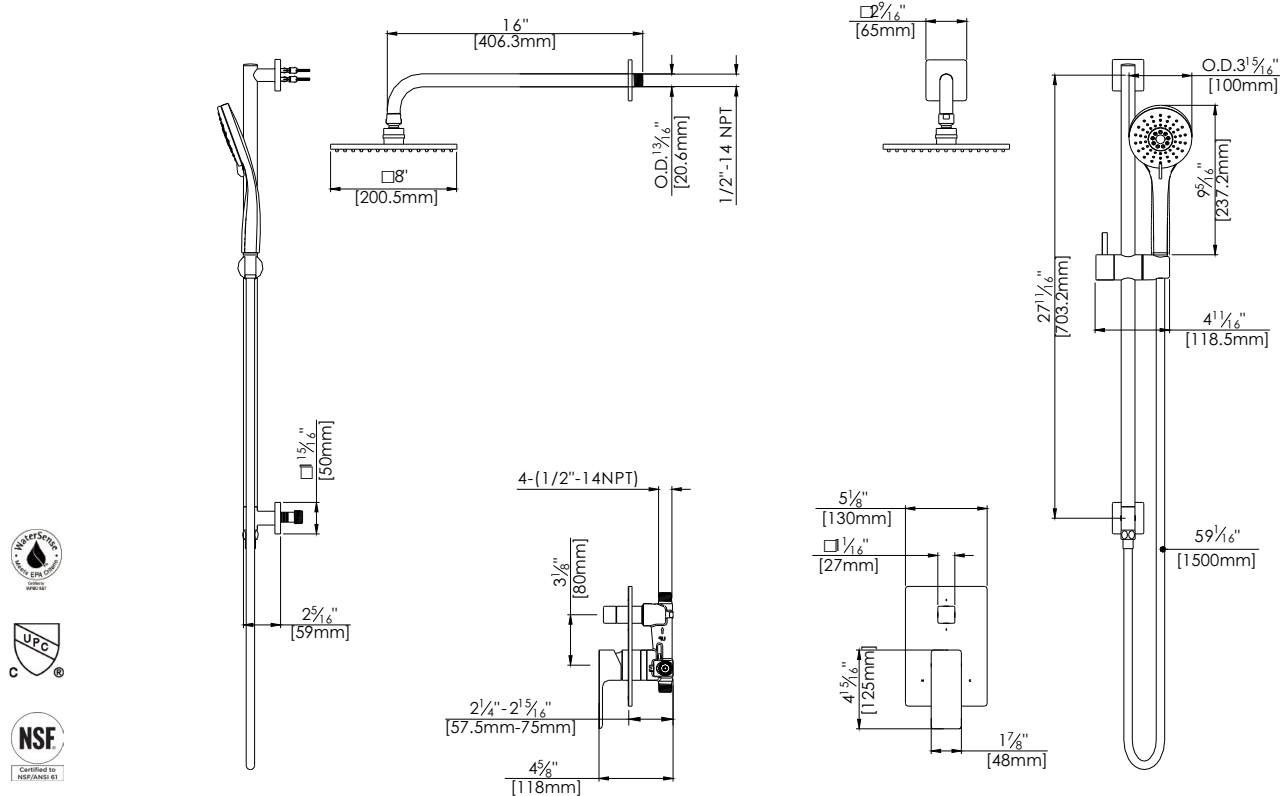

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower
@ 1.5 gpm: **F162025T-15**