fluid

Specifications:

- Metal construction
- Pressure balancing volume control with 2-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve tube and cap
FP6016041	Quad Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP601143-2PB	Square Cover Plate
FP6027008	8" Shower Arm
FP20100	5 Function Shower Head
FP6004048	Square Hand Shower
FA104	Slide Bar
FP6001047	Wall Outlet
FP6001006	60" Shower Hose

**sharing available where allowed by code

Kit with Alternate Handle: **F162204T-AS**

Features:

🖞 Requires F1012B

Integral Stops

Bubble Level

Speed Connect

Quad 5 Function Shower Head & Hand Shower Trim Kit

F162204T



Available in Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

Warranty:

NSE

Certified to NSF/ANSI 61

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.


Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F162204T-15**

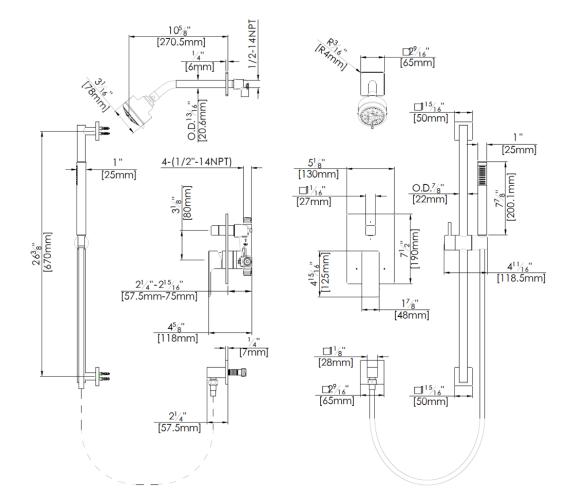

F162204T