fluid

Specifications:

- Metal construction
- Pressure balancing volume control with 3-way, two handle diverting
- Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1003B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6016041	Quad Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-3PB	Square Cover Plate
FP6021308	3" Ceiling Shower Arm
FP6001050	8" Shower Head*
FP6027008	8" Shower Arm
FP6000150	6" Shower Head
FP6001006	60" Shower Hose*
FA803	Slide Bar With Integral Outlet
FP40120	3 Function Hand Shower*

**sharing available where allowed by code

 $\label{eq:KitwithAlternate} \textbf{Kit with Alternate Handle: } \textbf{F163036T-AS}$



Features:



Requires F1003B



Bubble Level



Integral Stops



Speed Connect

Quad Double Shower Head and 3 Function Hand Shower Trim Kit

F163036T




* Matte Black features: FP6001007MB Hose, FP40130MB Hand Shower & FP6001150MB ABS Shower Head


Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

fluid

Technical Drawing

F163036T

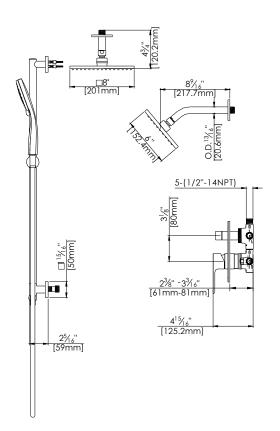

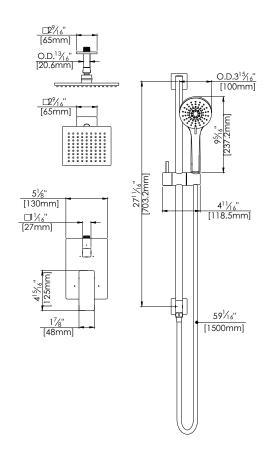







Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Shower Heads 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Shower Head @ 1.5 gpm: **F163036T-15**