

## Specifications:


- Metal construction for durability and reliability
- Pressure balancing with 2-way single handle diverting and temperature control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Valve and trim packages are sold separately
- Requires the fluid F1002B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

## Components:

F1001T .....	Sleeve Tube and Cap
FP6016041 .....	Quad Handle
FP6001033-2PS .....	Square Cover Plate
FP20100 .....	5 Function Shower Head
FP6027008 .....	8" Shower Arm
FP6056034 .....	Square Tub Spout

## Quad Tub & 5 Function Shower Trim Kit, (Single Handle)

F164104T



## Features:



Requires F1002B



Bubble Level



Integral Stops




Speed Connect

Polished Chrome (CP), Brushed Nickel (BN) & Matte Black (MB)

## Technical Drawing

F164104T

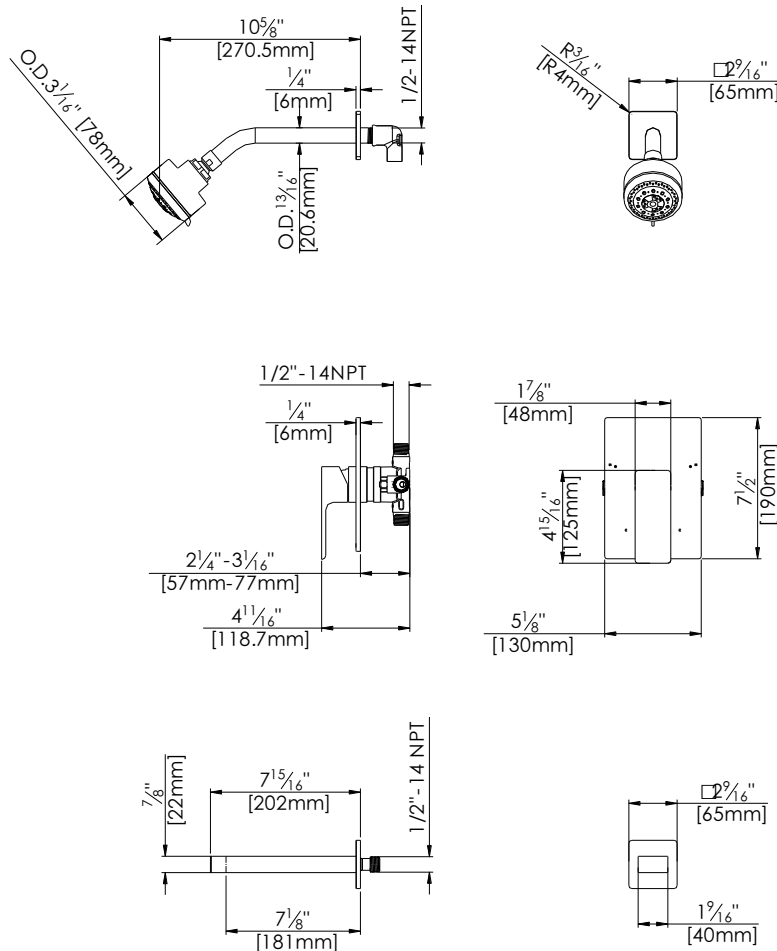

## Warranty:

Limited Lifetime Faucet Warranty  
against material and manufacturing  
defects for residential use.

2 Year Limited Warranty on all industrial,  
commercial and business applications.

## Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

## Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head  
@ 1.5 gpm: **F164104T-15**