fluid

Specifications:

- Metal construction
- → Pressure balancing with 2-way single handle diverting and temperature control
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1002B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve tube and cap
FP6016041	. Quad Handle
FP6001033-2PS	Square Cover Plate
FP6027008	8" Shower Arm
FP6000150	6" Shower Head
FP40120	3 Function Hand Shower
FA101	Slide Bar
FP6081048	Wall Outlet
FP6001006	60" Shower Hose

Features:



Requires F1002B



Bubble Level



Integral Stops

Quad 6" Shower Head & 3 Function Hand Shower Trim Kit

F164105T




Available in Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F164105T

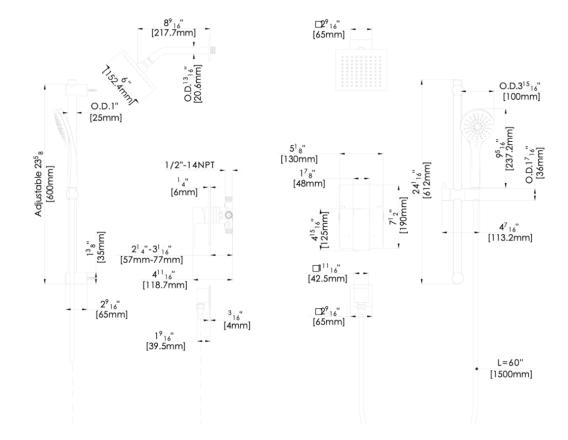

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F164105T-15**