

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control
- Max-temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Valve and trim packages are sold separately
- Requires the fluid F1001B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Cartridge Sleeve
FP6016041	Quad Handle
FP6001033-1PB	Square Cover Plate
FP20100	5 Function Shower Head
FP6027008	8" Shower Arm
FP6098034L	Curved Diverting Tub Spout

Quad Curved Diverting Tub Spout & 5 Function Shower Trim Kit

F161209T



Features:



Requires F1001B



Bubble Level



Integral Stops




Slip Fit

Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

Technical Drawing

F161209T

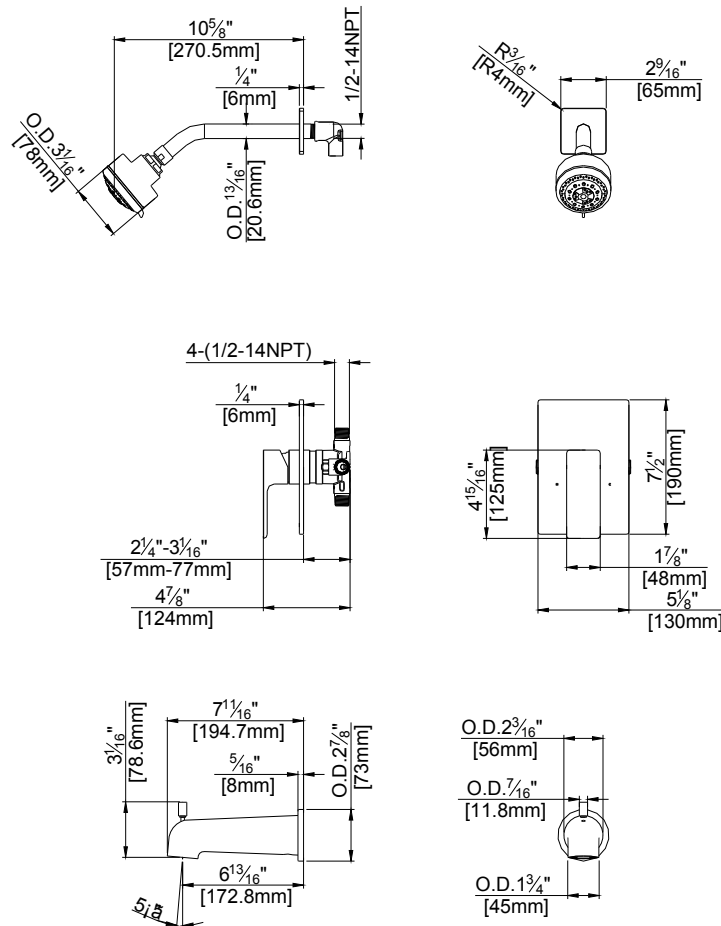

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

EPA Watersense Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head
@ 1.5 gpm: [F161209T-15](#)