fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Maximum-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1001B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Cartridge Sleeve
FP6016041	Quad Handle
FP6001033-1PB	Square Cover Plate
FP6096035	7.5" Square Tub Spout

Quad 7.5" Square Tub Spout Only Trim Kit

F161236T





Features:



📼 Bubble Level

Slip Fit


Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

fluid by Sustainable Solutions

F161236T September 2023

fluid

Technical Drawing

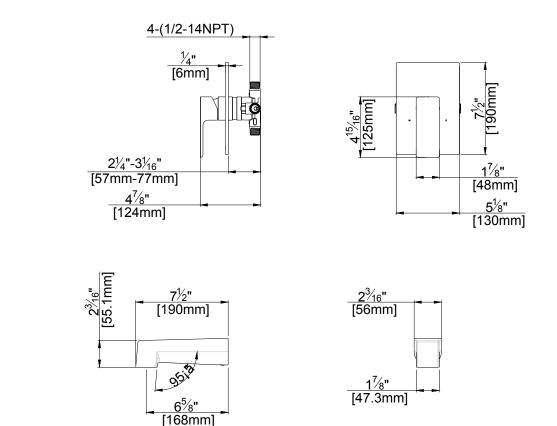

Warranty:

ð

AnterSenter

Certified to NSF/ANSI 61

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed EPA Watersense Listed

Flow Rate:

Tub Spout 4.5 gpm @ 60 psig

F161236T

pg 2.