## fluid

### **Specifications:**

- → Metal construction for durability and reliability
- → Pressure balancing, single handle diverting and temperature control
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1001B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

### **Components:**

| F1001T        | Cartridge Sleeve      |
|---------------|-----------------------|
| FP6016041     | Quad Handle           |
| FP6001033-2PS | Square Cover Plate    |
| FP10130       | 4" Square Shower Head |
| FP6027008     | 8" Shower Arm         |
| FP6098035L    | Curved Tub Spout      |

### Quad Curved Tub Spout & 4" Shower Trim Kit

F164110T









**Features:** 

Requires F1002B



Bubble Level



Integral Stops




Slip Fit


Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)


# fluid


### **Technical Drawing**

F164110T






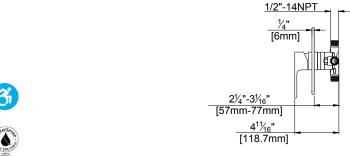












### **Warranty:**

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

### **Codes and Standards:**

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed EPA Watersense Listed

#### Flow Rate:

Shower Head 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head @ 1.5 gpm: F164110T-15