fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 3-way, two handle diverting
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- → Requires the fluid F1003B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

. Cartridge Sleeve
. Oceanside Handle
. Diverter Sleeve
. Diverter Handle
. Square Cover Plate
. 8" Brass Showerhead
. 16" Shower Arm
. 3 Function Hand Shower
. Slide Bar With Integral Outlet
. 60" Shower Hose
. Sloped Tub Spout

^{**}sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: F233124-AS



Features:



Requires F1003B



Bubble Level



Integral Stops



Speed Connect

Oceanside Tub, Rain Shower & Hand Shower on Slide Bar Trim Kit

F233124T




Available in Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F233124T

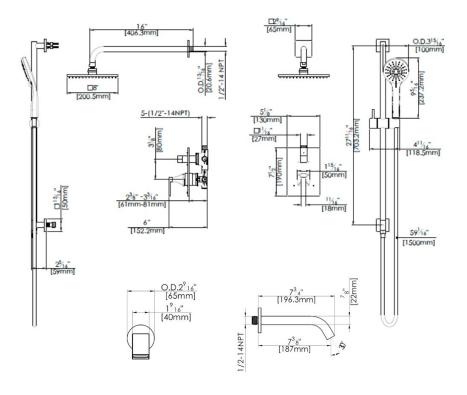







Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed,

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle: F233124T-AS

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F233124T-15**