fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control with 3-way two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1003B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Cartridge Sleeve
FP6028041	Wisdom Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-3PB	Cover Plate
FP6016008	8" Shower Arm
FP6000350	6" Shower Head
FP6001048	Round Hand Shower
FA105	Slide Bar
FP6002047	Wall Outlet
FP6001006	60" Shower Hose
FP6057034	Pipe Tub Spout

^{**}sharing available where allowed by code

Features:



Requires F1003B



Bubble Level



Integral Stops



Speed Connect

Wisdom Tub, 6" Shower Head & Hand Shower Trim Kit


F283243T



Available in Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F283243T

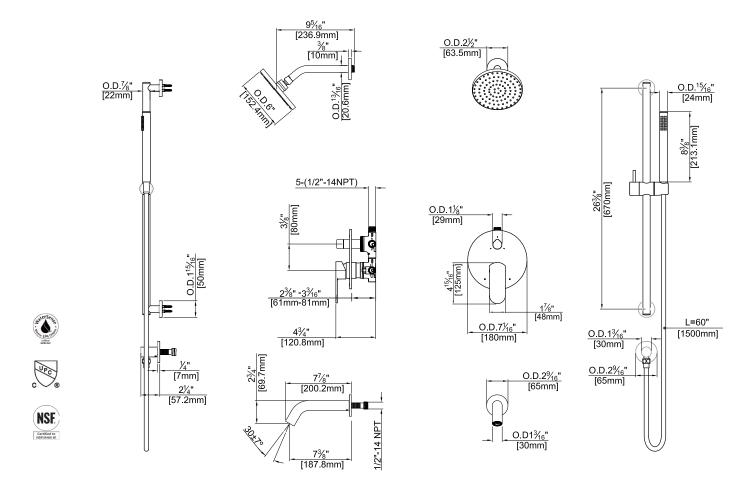

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:



Kit with alternate ADA diverter handle: **F283243T-AR**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F283243T-15**