fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 3-way two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1003B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)


Components:

F1001T	Cartridge Sleeve
FP6023041	Oceanside/Vancouver Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-3PB	Cover Plate
FP6027008	8" Shower Arm
FP6000150	6" Shower Head
FP6004048	Square Hand Shower
FA104	Slide Bar
FP6001047	Wall Outlet
FP6001006	60" Shower Hose
FP6056034	Cubed Tub Spout

^{**}sharing available where allowed by code

Features:







Speed Connect

Oceanside/Vancouver Tub, 6" Shower Head & Hand Shower Trim

F233247T




Available in Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F233247T

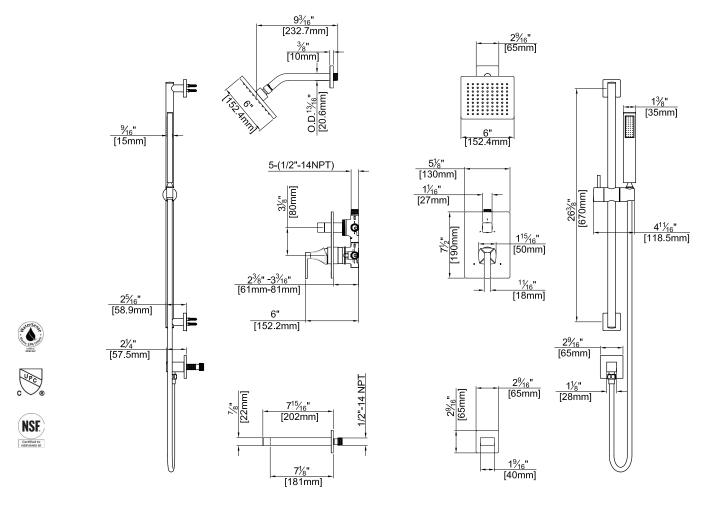

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:



Kit with alternate ADA diverter handle: **F233247T-AS**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F233247T-15**