





Specifications:

- Heavy brass construction for durability and reliability
- Kerox ceramic cartridge ensures lifelong trouble free service
- Swivel Spout with 360-degree rotation
- Single handle operation, allows both volume and temperature control
- Limited to flow rate of 1.8 gpm (6.8 lpm) at psi
- Stainless steel flex supplies with $\frac{3}{8}$ " comp. connection
- Max. deck thickness $1\frac{1}{2}$ " (38 mm) with spacer and $2\frac{1}{8}$ " (54 mm) without spacer
- Minimum $3\frac{1}{16}$ " (78 mm) distance from back splash wall
- $1\frac{1}{2}$ " (38 mm) single faucet hole size for drilling is recommended
- ADA Compliant

Features:

-  360 Degree Spout Rotation
-  Dual Spray Kitchen Faucet
-  Pull Down Kitchen Spout
-  Ceramic Disk Cartridge
-  Heavy brass construction
-  Magnetic Docking

Pull Down Pre-Rinse Industrial Look Dual Spray Kitchen Faucet


F830



Polished Chrome (CP), Brushed Nickel (BN), Matte Black (MB)

Technical Drawing

F830

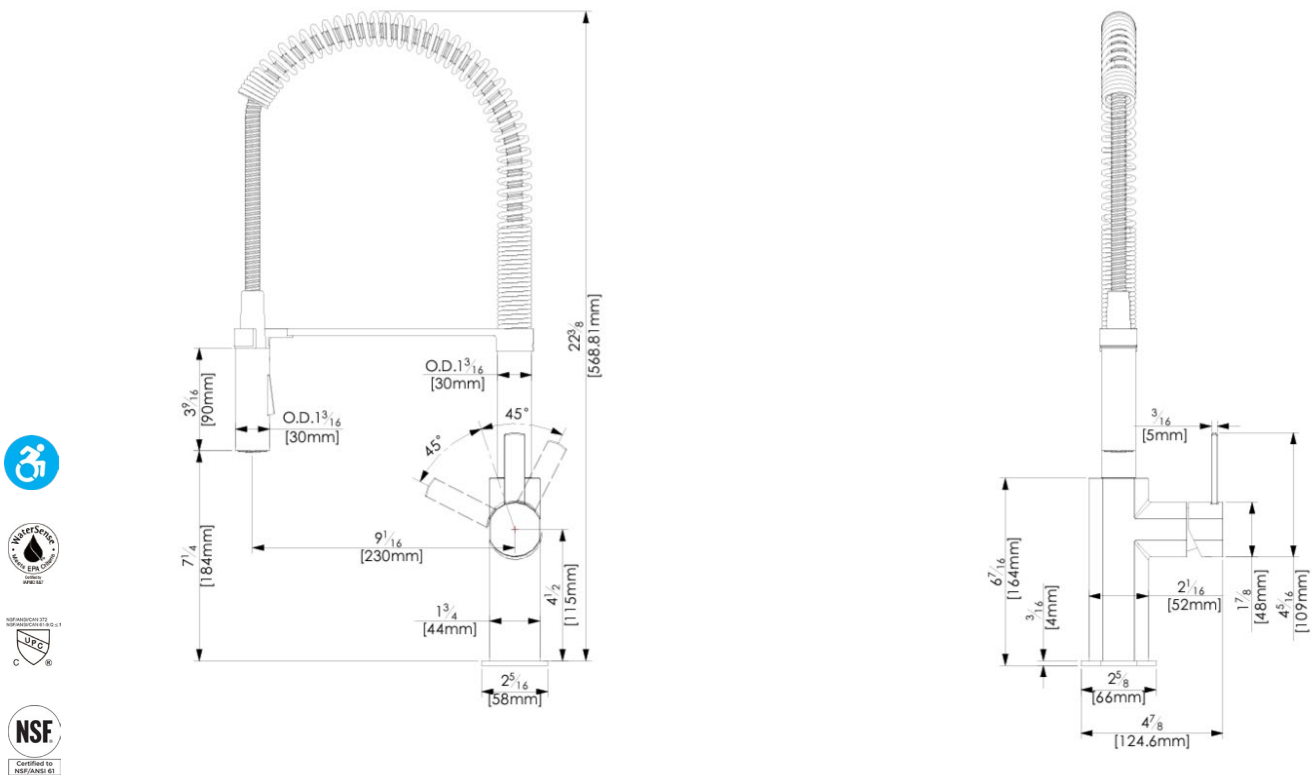

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1
CSA B125.1
NSF/ANSI/CAN 61: Q < 1
NSF / ANSI / CAN372
IAPMO / cUPC Listed
EPA Watersense Listed
ADA Compliant

Flow Rate:

1.8 gpm, (6.8 lpm), @ 60 psig

Low Flow Alternative:

@1.5 gpm (5.7 lpm) **F830-15**