fluid

Yaletown Hand Shower Trim Kit

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing with volume control
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- > Valve and trim packages are sold separately
- → Requires the fluid F1001B pressure balancing valve, (available in solder, PEX and PEX-W.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-1PB	Cover Plate
FP6001048	Round Hand Shower
FA105	Slide Bar
FP6002047	Wall Outlet
FP6001006	60" Shower Hose

F191250T



Features:



Requires F1001B



Bubble Level



Integral Stops




Speed Connect

Available in Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F191250T

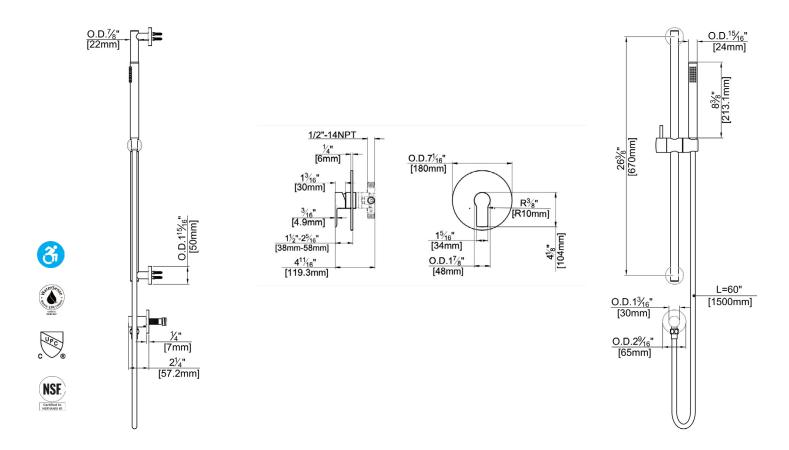

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F191250T-15**