fluid

Specifications:

- ➔ Metal construction for durability and reliability
- Pressure balancing volume control (non-diverting)
- → Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1001B pressure balancing valve, (sold separately and available with shut off in solder, PEX and PEX-W.)

Components:

F1001T	. Cartridge Sleeve
FP6021041	. Jovian Handle
FP6001033-1PB	. Cover Plate
FP6016034	. Quad-Jovian Tub Spout


Jovian Square Tub Spout Only Trim Kit







Features:



📼 Bubble Level

E

Speed Connect


Available in Polished Chrome (CP) and Brushed Nickel (BN)

fluid by Sustainable Solutions

F211255T November 2023

fluid

Technical Drawing

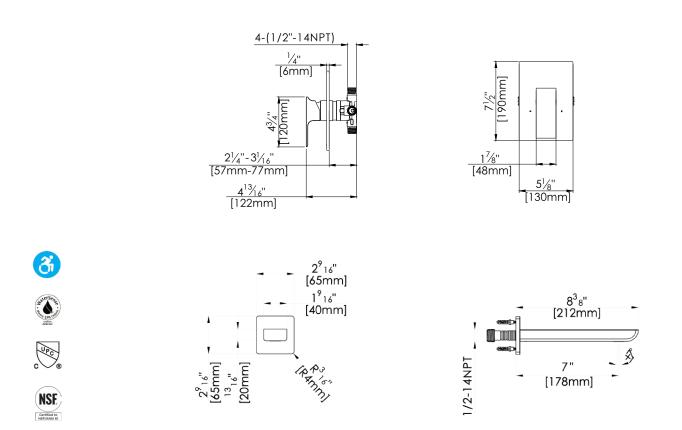

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1, CSA B125.1, IAPMO/cUPC Listed, EPA Watersense Listed

Flow Rate:

Tub Spout 4.5 gpm @ 60 psig

F211255T

F211255T November 2023

pg 2.