fluid

Specifications:

- → Metal construction for durability and reliability
- > Pressure balancing volume control (non-diverting)
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- > Valve and trim packages are sold separately
- Requires the fluid F1001B pressure balancing valve, (sold separately and available with shut off in solder, PEX and PEX-W.)

Components:

F1001T	Cartridge Sleeve
FP6023041	Oceanside/Vancouver Handle
FP6001033-1PB	Cover Plate
FP6054034	Sloped Tub Spout

Oceanside/Vancouver Square Tub Spout Only Trim Kit

F231255T





Features:



Requires F1001B



Bubble Level



Integral Stops




Speed Connect

Available in Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing


F231255T

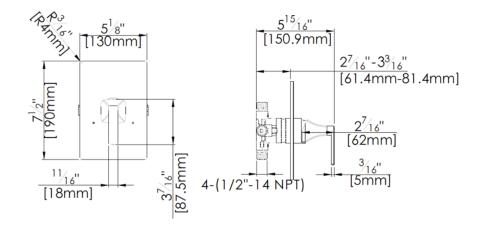












Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1, CSA B125.1, IAPMO/cUPC Listed, EPA Watersense Listed

Flow Rate:

Tub Spout 4.5 gpm @ 60 psig