# fluid

## **Specifications:**

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- > Valve and trim packages are sold separately
- → Requires the fluid F1001B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

### **Components:**

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-1PB	Round Cover Plate
FA101	Slide Rail
FP6082048	Round Wall Outlet
FP40120	3-Function Hand Shower
FP6001006	60" Shower Hose
FP6055034	Round Diverting Tub Spout

## Yaletown Hand Shower on Slide Rail Trim Kit

F191239T



### **Features:**



Requires F1001B



Bubble Level



Integral Stops



Speed Connect

Polished Chrome (CP), Brushed Nickel (BN)

# fluid

## **Specifications:**

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- > Valve and trim packages are sold separately
- → Requires the fluid F1001B or F1011B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

### **Components:**

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-1PB	Round Cover Plate
FA101	Slide Rail
FP6082048	Round Wall Outlet
FP40120	3-Function Hand Shower
FP6001006	60" Shower Hose
FP6055034	Round Diverting Tub Spout

## Yaletown Hand Shower on Slide **Rail Trim Kit**

F191239T



#### **Features:**



Requires non-diverting F1001B or F1011B valve



Integral Stops



Bubble Level



Speed Connect


Polished Chrome (CP), Brushed Nickel (BN)



# fluid

## **Technical Drawing**

## F191239T

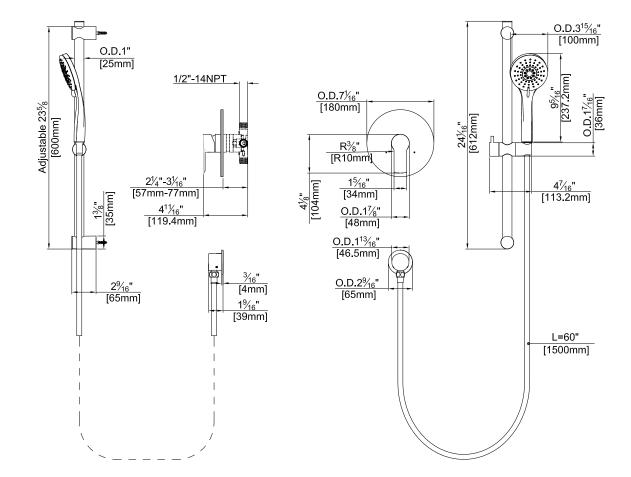



Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

### **Codes and Standards:**

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed EPA Watersense Listed

#### Flow Rate:

Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F191011T-15**